

ARCHITECTURAL CATALOGUE

by 

H-1036 Budapest
Nagyszombat utca 1.

pontlight.com

TABLE OF CONTENTS

Introduction

About Us	6
References	8

Linear Profiles / Open shapes

Lina	12
Lyra	16
Alina Nova	20
Dotline	24
Boldline	28
Proline	32
Selena	36
Yumi	40
Anna spiral	44
Hannah spiral	46

Circular shapes

Olena	50
Olena Disk	54
Rina	58
Rina Deep	62
Rina Track	66
Ilona Dark	70
Ollie	74
Ellie	78
Anna O	82
Anna Inverse	86
Hannah O	90

Geometric shapes


Anna Triangle	94
Swan	98
Swella	102
Anna Rectangle	106
Tilia	110
Milia	114
Paula	118
Pamela	122
Anna Hexagon	126
Xara	130
Xenia	134

Recessed

Amy	136
Audrey	138
Lianna	140
Darcy	142
Dotline R	146

Colors and Codes

Colors	148
Coding System	149

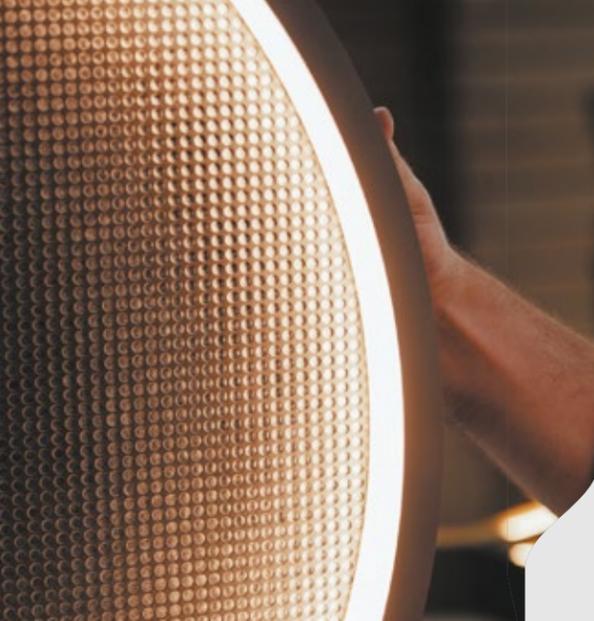

DESIGNED WITH YOU

Pont Light specializes in the manufacturing of high-quality aluminum profile luminaires featuring the latest LED technology.

Our diverse product range is designed to inspire creativity and support the vision of designers and architects. This acatalogue serves as a source of ideas and possibilities, presenting solutions that seamlessly combine aesthetics, performance, and innovation.

We deliver bespoke lighting solutions for retail spaces, hotels, office buildings, and private residences - creating lighting concepts that reflect the unique identity and character of every project.



MANUFACTURING

All our luminaires are manufactured in our own production facility, spanning nearly 1,500 m².

The majority of our manufacturing processes take place in-house - from the design and extrusion of aluminum profiles to final assembly and packaging. This integrated approach allows us to maintain full control over quality, precision, and performance at every stage of production.




BESPOKE PRODUCTS

Pont Light is fully equipped to handle both standard and customized production. Precise project execution begins with careful product design, ensuring that every technical and aesthetic requirement is considered before manufacturing starts. For bespoke solutions, we often rely on specialized hand-operated machinery, allowing flexibility and meticulous attention to detail. This approach enables us to produce a wide range of lighting fixtures tailored to the specific needs of each custom project.






LINA

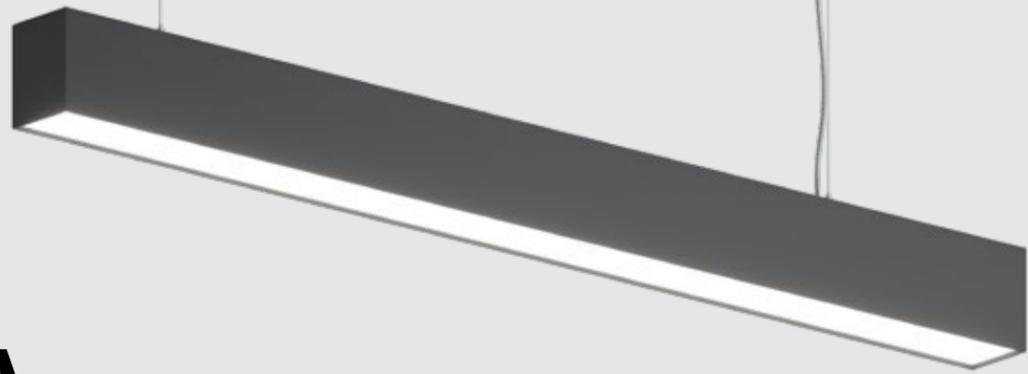

LINA

- Straight Linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

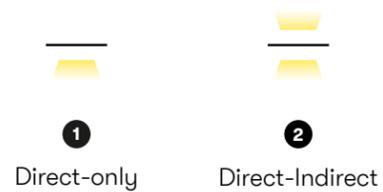


PROFILE SIZES


Direct/indirect options





1 Direct-only

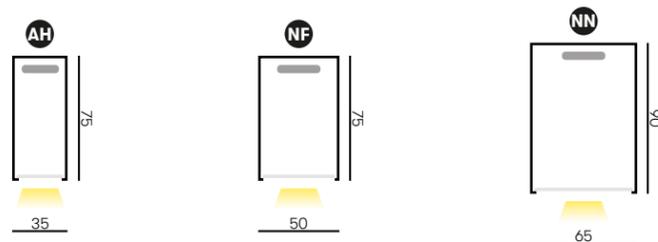

2 Direct-Indirect

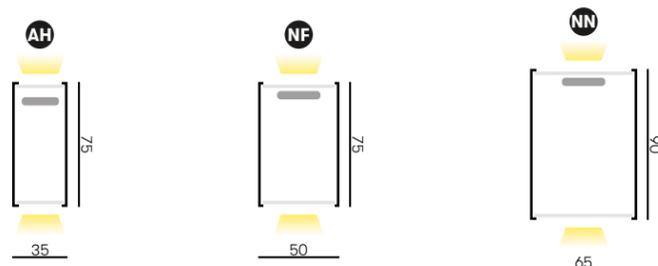

MOUNTING TYPES

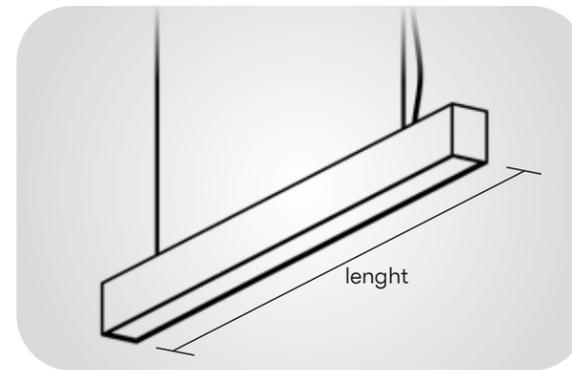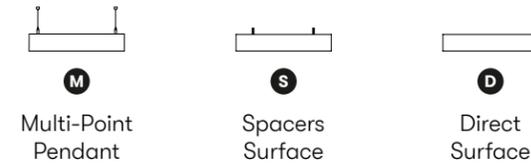

- L Luminaire name
- N Lighting type
- 1 Profile size
- N Mounting type
- F Size
- M CRI
- L Color temperature
- Q Driver type
- 8 Power
- 2 Diffuser type
- B Body color



CONFIGURATE PRODUCT


	Size	Power*	Light Flux**
LG	1140	26 W	2912 lm
LL	1420	33 W	3696 lm
LN	1700	39 W	4368 lm
LO	1980	46 W	5152 lm
LO	2260	52 W	5824 lm

	Size	Power*	Light Flux**
LG	1140	39 W	4368 lm
LL	1420	49 W	5488 lm
LN	1700	59 W	6608 lm
LO	1980	68 W	7616 lm
LO	2260	78 W	8736 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature


- CRI: 8 80 CRI, 9 90 CRI
- COLOR TEMPERATURE: 2 2700 K, 3 3000 K, 4 4000 K, 1 RGBW, 5 Tunable White
- DRIVER TYPE: N ON-OFF, D DALI, P Push DIM, B Bluetooth
- POWER: 6 15 [W/m], 2 23 [W/m], 3 30 [W/m]
- DIFFUSER: M microprismatic, S standard (opal), T lenses

BODY COLORS

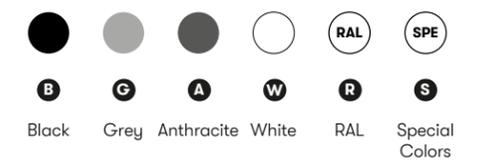




LYRA

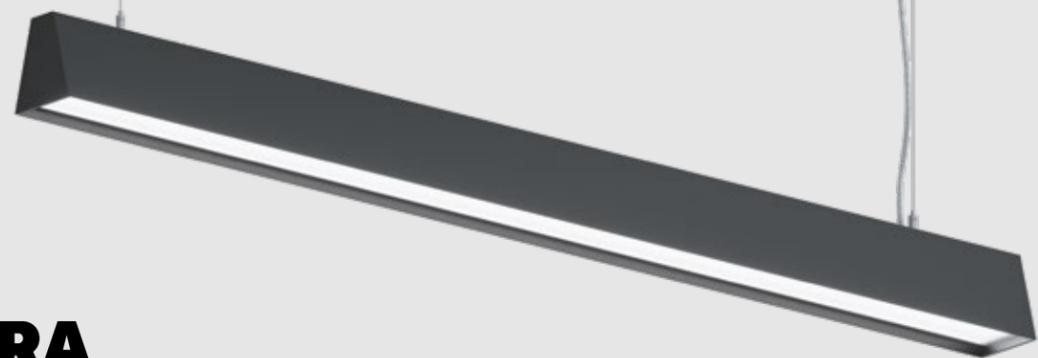


LYRA

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

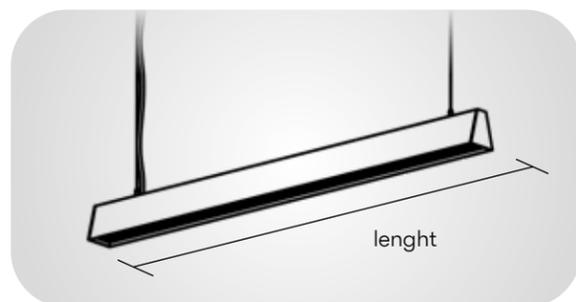

MOUNTING TYPES



PROFILE SIZES


Direct/indirect options



internal driver



external driver




	Size	Power*	Light Flux**
Direct-only	LG 1140	26 W	2300 lm
	LL 1420	32 W	2890 lm
	LN 1700	39 W	3450 lm
	LO 1980	45 W	4026 lm
	LQ 2260	52 W	4595 lm
Direct-Indirect	LG 1140	39 W	3415 lm
	LL 1420	48 W	4340 lm
	LN 1700	59 W	5200 lm
	LO 1980	68 W	6036 lm
	LQ 2260	78 W	6895 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	2 23 [W/m]	S standard (opal)
	4 4000 K	N ON-OFF	3 30 [W/m]	L lenses
		D DALI		
		P Push DIM		
		B Bluetooth		

BODY COLORS

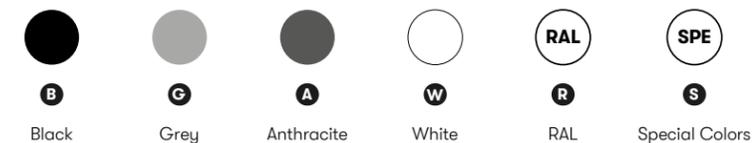

- L Luminaire name
- Y Lighting type
- 1 Profile size
- N Mounting type
- X Size
- M CRI
- L Color temperature
- G Driver type
- 8 Power
- 2 Diffuser type
- N Body color
- 6
- S
- B
- B




CONFIGURATE PRODUCT






ALINA NOVA

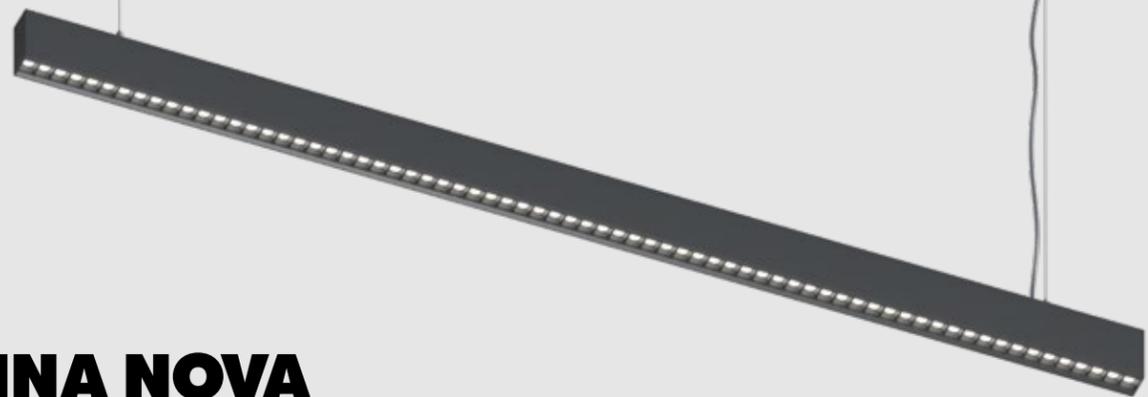


ALINA NOVA


- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

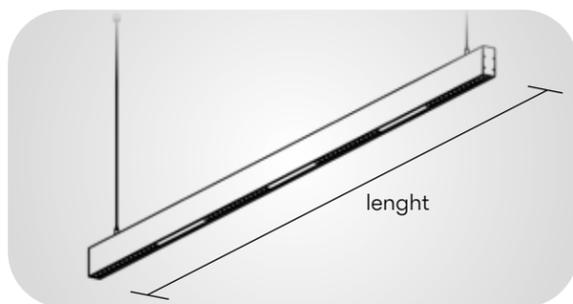

LIGHTING TYPES

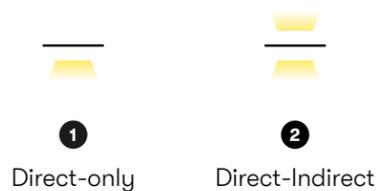

MOUNTING TYPES



PROFILE SIZES



Direct/indirect options



internal driver



external driver

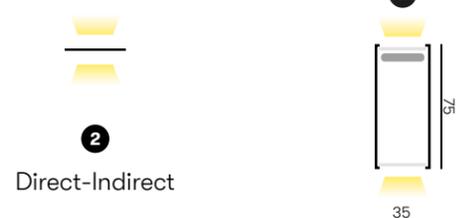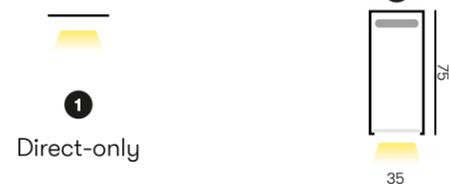


	Size	Power*	Light Flux**
	LC 845	21 W	1869 lm
	LF 1122	28 W	2492 lm
	LK 1400	35 W	3115 lm
	LM 1680	42 W	3738 lm
	LC 845	34 W	3026 lm
	LF 1122	45 W	4005 lm
	LK 1400	56 W	4984 lm
	LM 1680	67 W	5963 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	C Custom [W/m]	S standard (opal)
	4 4000 K	D DALI		L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

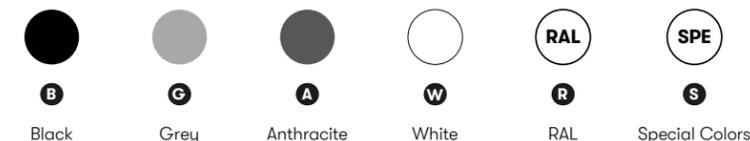


- A Luminaire name
- N Lighting type
- 1 Profile size
- A Mounting type
- H Size
- M CRI
- L Color temperature
- C Driver type
- C Power
- D Diffuser type
- B Body color



CONFIGURATE PRODUCT

BODY COLORS



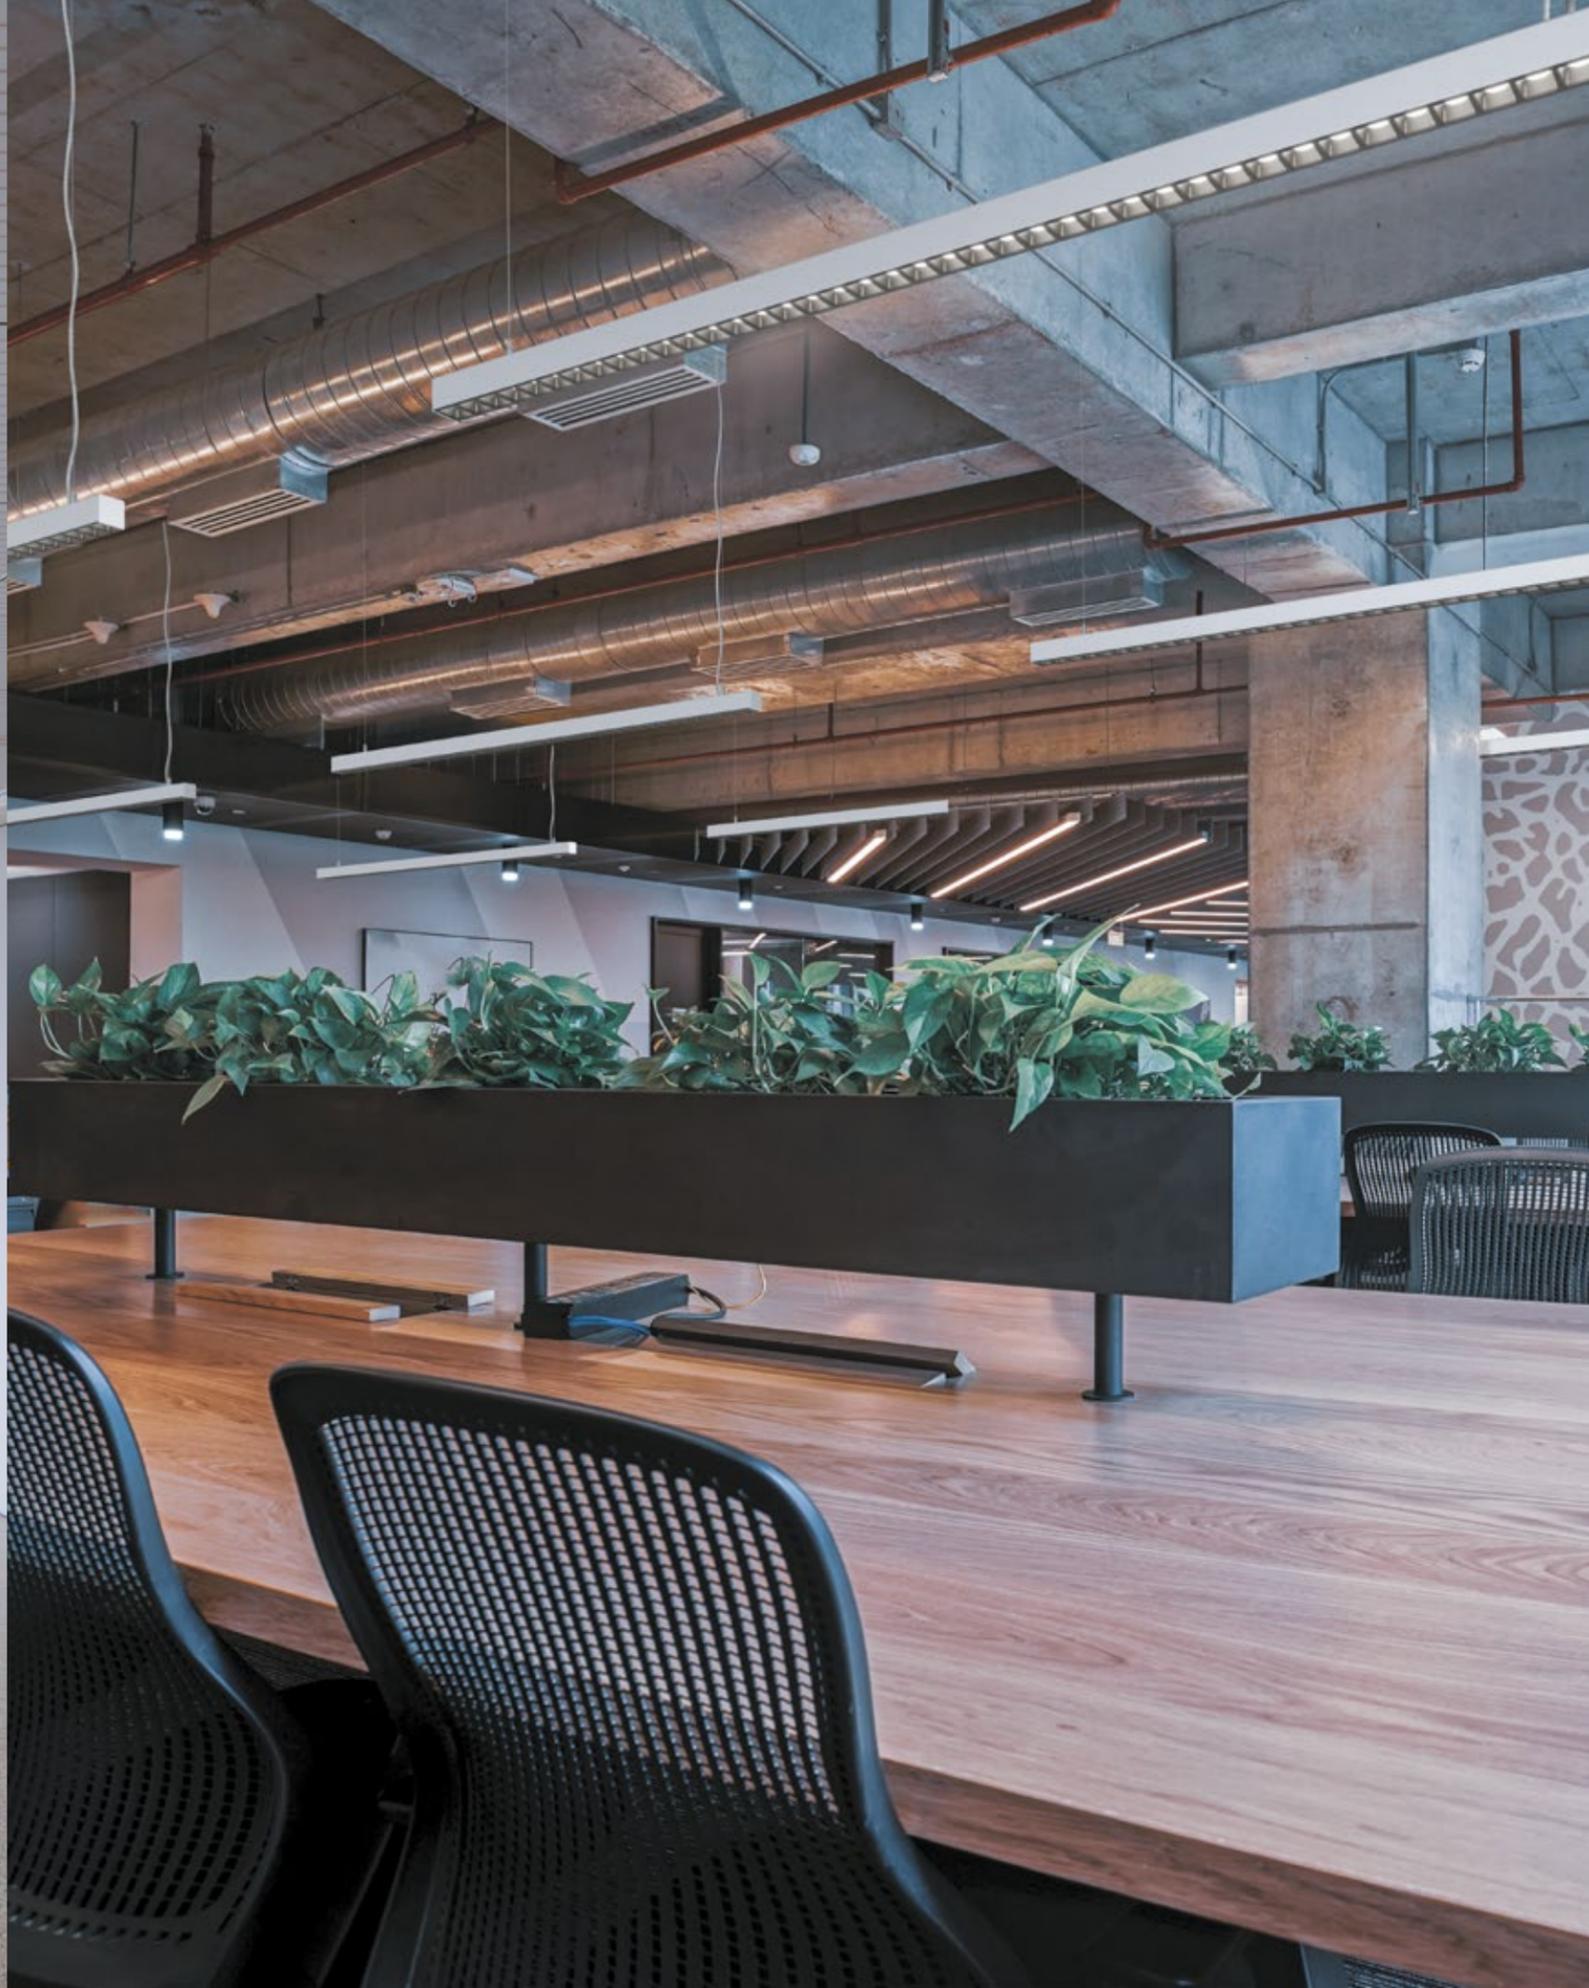

DOTLINE




DOTLINE

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES



PROFILE SIZES

Direct/indirect options



internal driver



external driver




	Size	Power*	Light Flux**
LC	845	21 W	1869 lm
LF	1122	28 W	2492 lm
LK	1400	35 W	3115 lm
LM	1680	42 W	3738 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White		S standard (opal)
	4 4000 K	N ON-OFF		L lenses
		D DALI		
		P Push DIM		
		B Bluetooth		

BODY COLORS

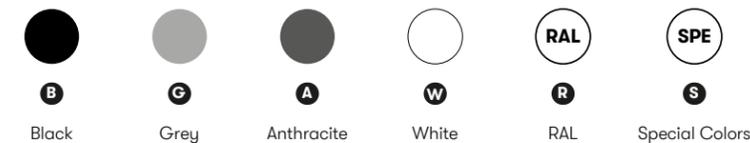

- D — Luminaire name
- O — Lighting type
- 1 — Profile size
- A — Mounting type
- L — Size
- M — CRI
- L — Color temperature
- C — Driver type
- 8 — Power
- 2 — Diffuser type
- N —
- C —
- D —
- B — Body color




CONFIGURATE PRODUCT

BODY COLORS





BOLDLINE

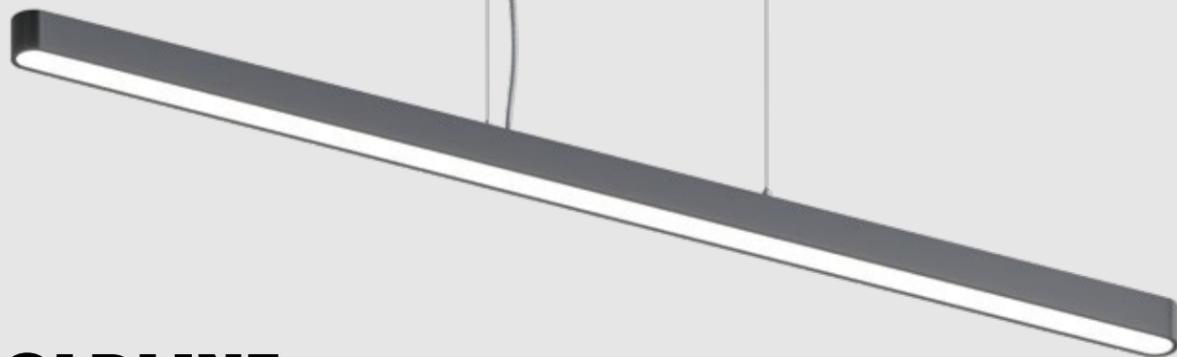


BOLDLINE

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES





MOUNTING TYPES



PROFILE SIZES

Direct/indirect options

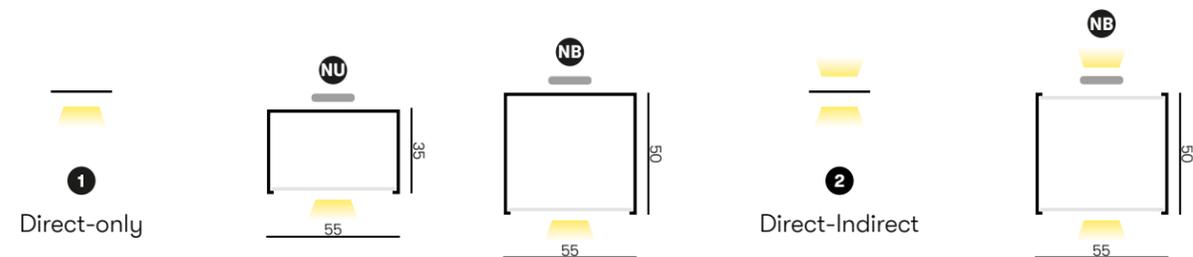


	Size	Power*	Light Flux**
	L5 1500	42W	4200 lm
	L5 1500	65 W	6400 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	2 Tunable White		S standard (opal)
	4 4000 K	N ON-OFF		T lenses
		D DALI		
		P Push DIM		
		B Bluetooth		


BODY COLORS



- B Luminaire name
- L Lighting type
- 1 Profile size
- N Mounting type
- U Size
- M Size
- L CRI
- 5 Color temperature
- 8 Driver type
- 2 Power
- N Diffuser type
- C Diffuser type
- S Body color



CONFIGURATE PRODUCT

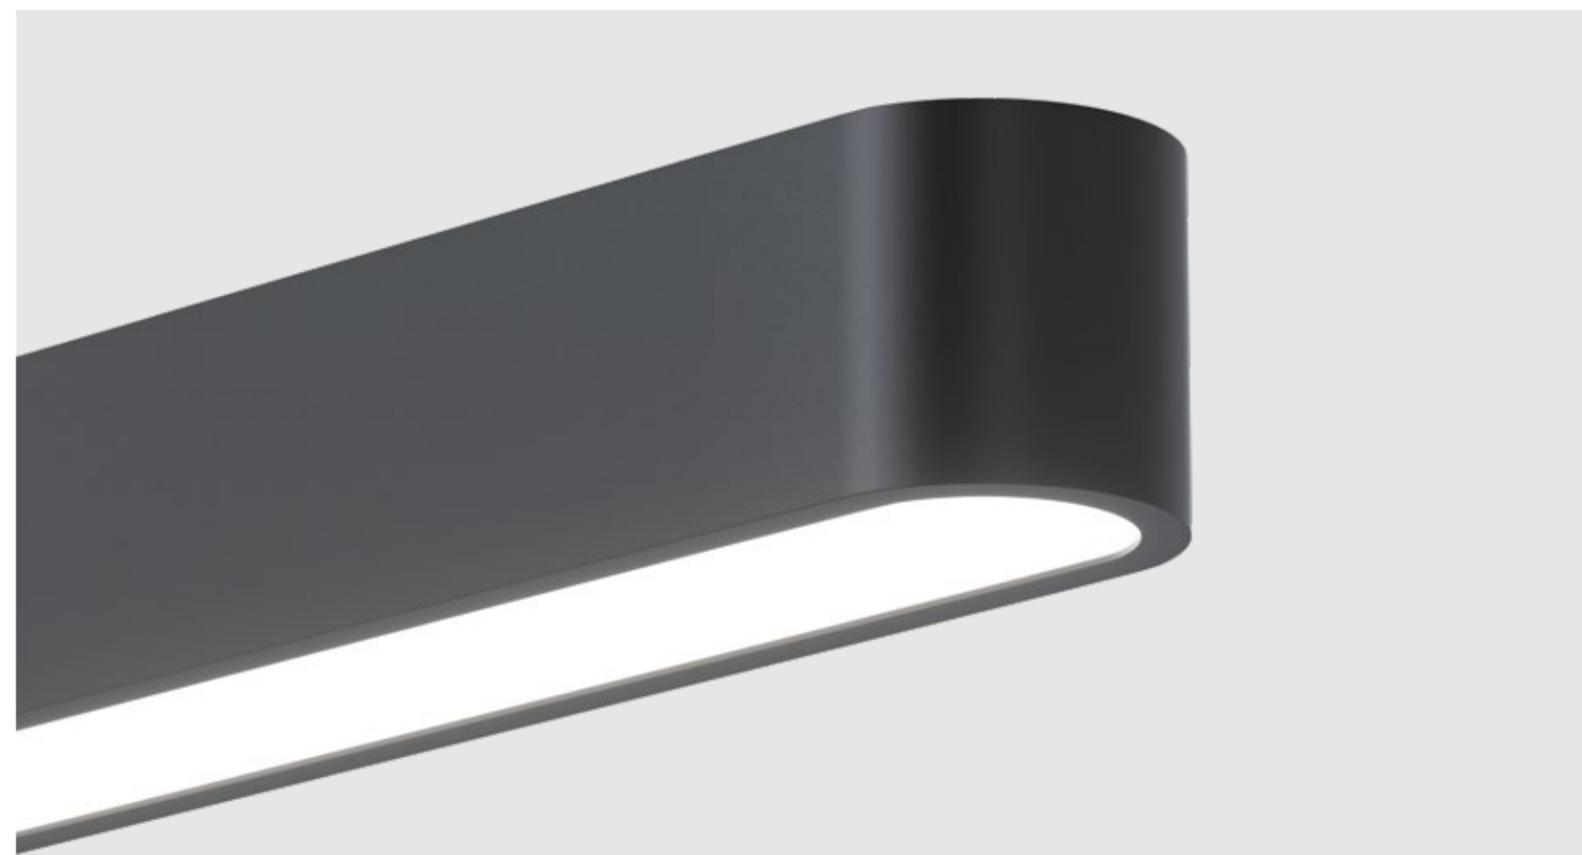



PROLINE







PROLINE

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES



PROFILE SIZES



Direct/indirect options



internal driver



external driver




Size	Power*	Light Flux**
L5 1500	42W	4200 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI		S standard (opal)
	4 4000 K	P Push DIM		L lenses
		5 Tunable White		
		B Bluetooth		

BODY COLORS

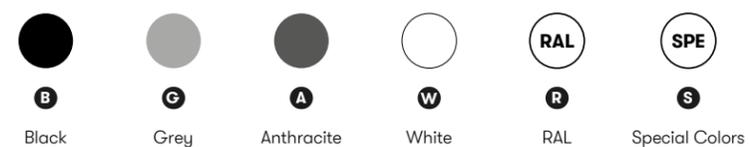

- P — Luminaire name
- R — Lighting type
- 1 — Profile size
- N — Mounting type
- G — Size
- M — CRI
- L — Color temperature
- 5 — Driver type
- 8 — Power
- 2 — Diffuser type
- N —
- C —
- S —
- B — Body color



CONFIGURATE PRODUCT



SELENA






SELENA


- Curved Linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES


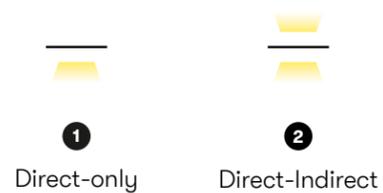


PROFILE SIZES

Direct/indirect options

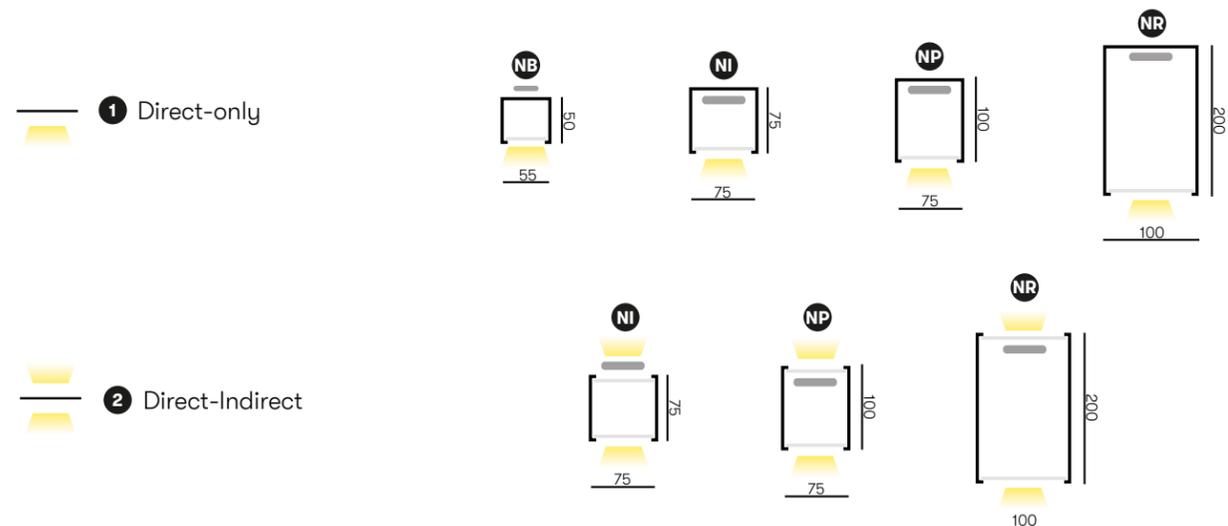

MOUNTING TYPES

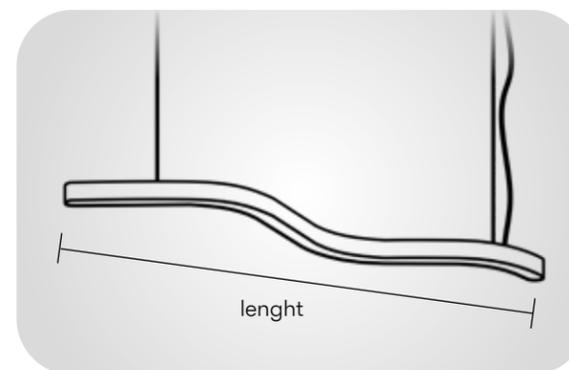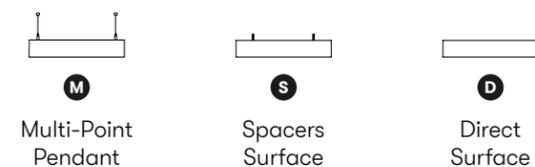

S — Luminaire name
E — Lighting type
1 — Profile size
N — Profile size
B — Profile size
M — Mounting type
L — Mounting type
E — Size
8 — CRI
2 — Color temperature
N — Driver type
6 — Power
S — Diffuser type
B — Diffuser type
B — Body color



CONFIGURATE PRODUCT


	Size	Power	Light Flux*
 LE	1000	15 W	1680 lm
	1000	23 W	2576 lm
	1000	30 W	3360 lm

	Size	Power*	Light Flux**
 LE	1000	23 W	2576 lm
	1000	35 W	3920 lm
	1000	45 W	5040 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	2 23 [W/m]	S standard (opal)
	4 4000 K	D DALI	3 30 [W/m]	L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

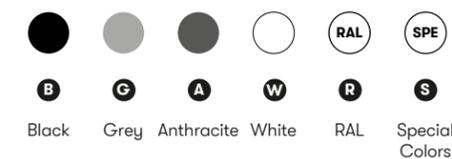






YUMI

- Y-shaped LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES

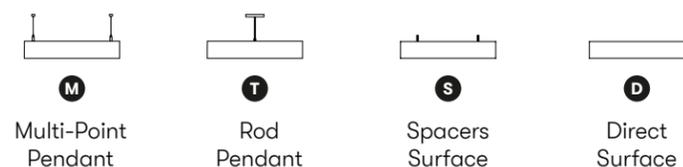

PROFILE SIZES

Direct/indirect options




	Size	Power*	Light Flux**
	LA L600	41 W	4592 lm
	LH L1200	83 W	9296 lm
	LA L600	62 W	6944 lm
	LH L1200	124 W	13888 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K	P Push DIM	3 30 [W/m]	L lenses
		5 Tunable White		
		B Bluetooth		

BODY COLORS

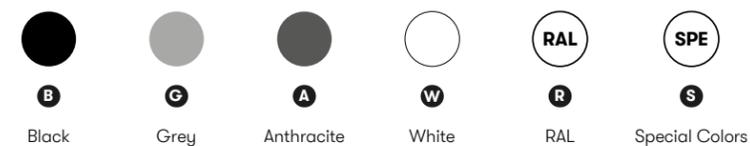

- Y — Luminaire name
- M — Lighting type
- 1 — Profile size
- N — Mounting type
- Q — Size
- M — CRI
- L — Color temperature
- H — Driver type
- 8 — Power
- 2 — Diffuser type
- N — S
- 2 — B
- S — Body color



CONFIGURATE PRODUCT





ANNA SPIRAL




HANNAH SPIRAL




ANNA SPIRAL

- Special shaped luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES





MOUNTING TYPES

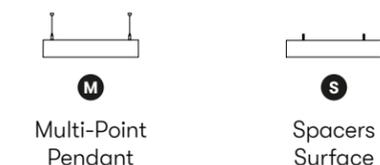

PROFILE SIZES

Direct/indirect options

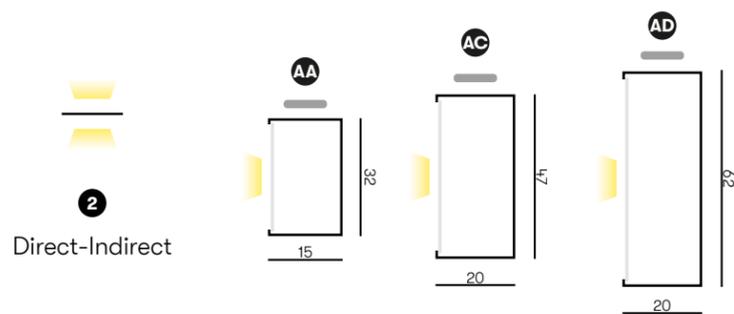


LP	Size	Power	Light Flux*
	2000	55 W	4950 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	2 23 [W/m]	1 microprismatic
9 90 CRI	3 3000 K	5 Tunable White	3 30 [W/m]	5 standard (opal)
	4 4000 K	D DALI		1 lenses
		P Push DIM		
		B Bluetooth		


BODY COLORS




- O — Luminaire name
- D — Lighting type
- 1
- N
- W — Profile size
- M — Mounting type
- Q
- P — Size
- 8
- 2 — CRI
- N — Color temperature
- 8 — Driver type
- S — Power
- S — Diffuser type
- B
- B — Body color



CONFIGURATE PRODUCT

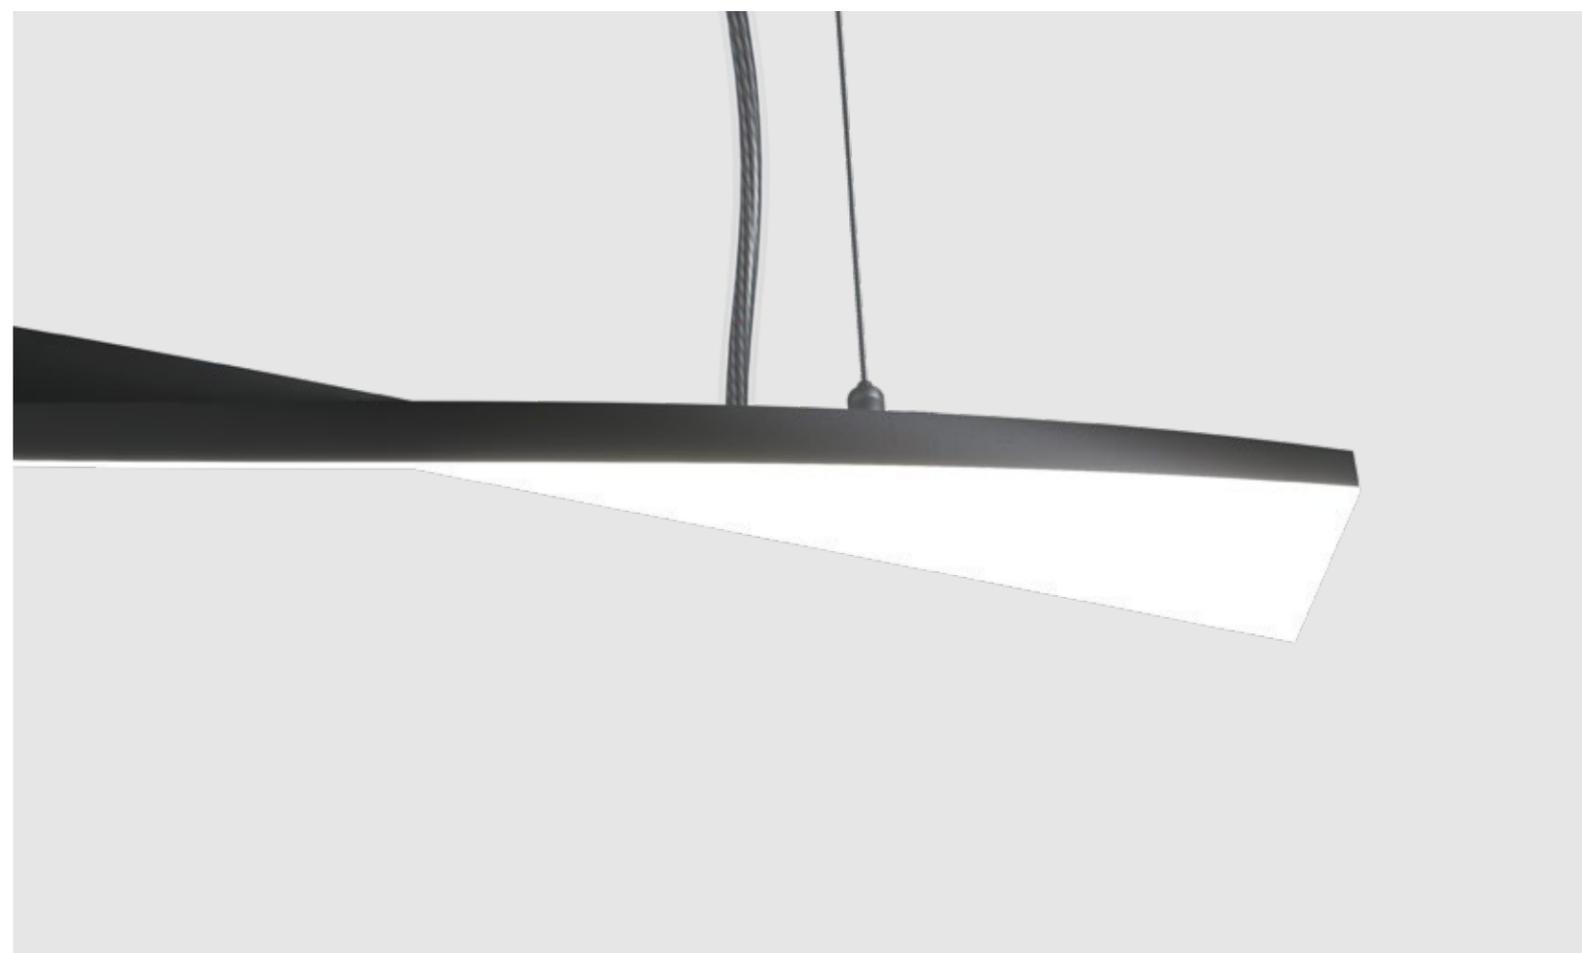


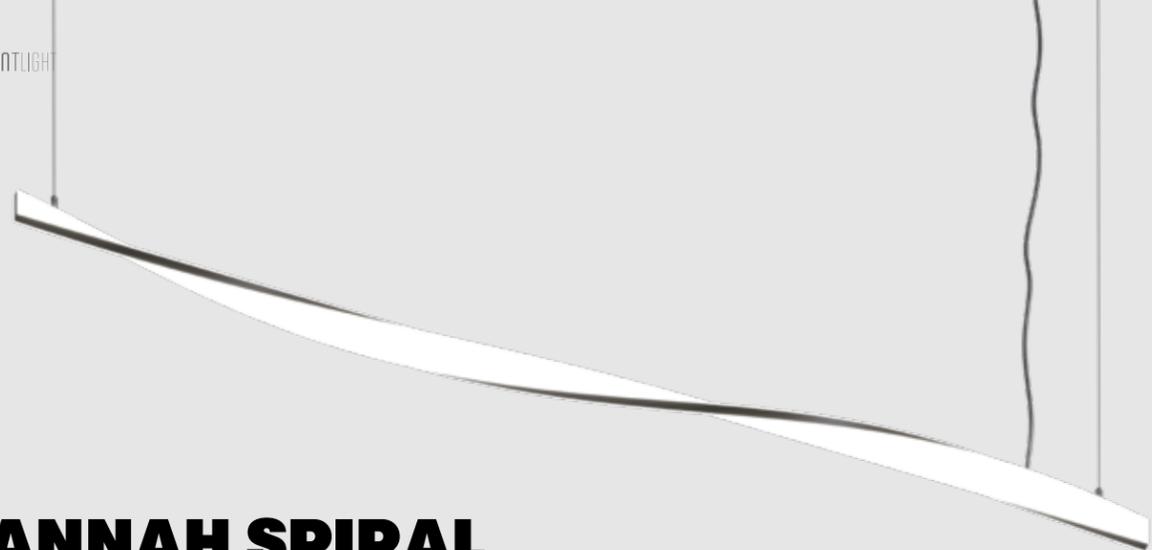



HANNAH SPIRAL

- Special shaped luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES





MOUNTING TYPES

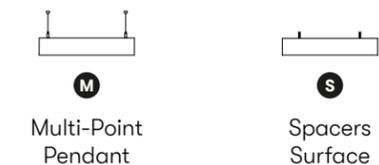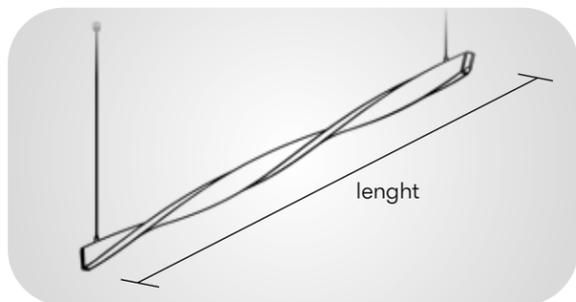

PROFILE SIZES

Direct/indirect options

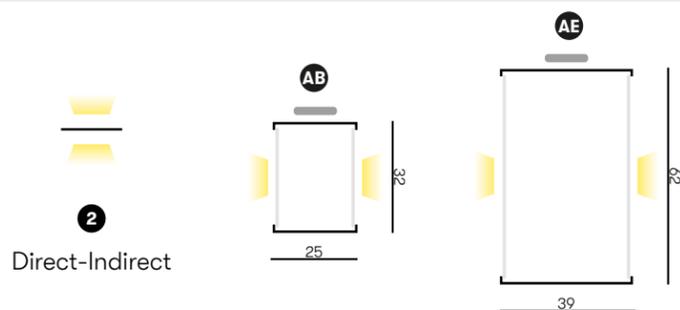


Size	Power	Light Flux*
2000	55 W	4950 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	2 23 [W/m]	1 microprismatic
9 90 CRI	3 3000 K	D DALI	3 30 [W/m]	5 standard (opal)
	4 4000 K	P Push DIM		1 lenses
		B Bluetooth		


BODY COLORS



- H Luminaire name
- S Lighting type
- 2 Profile size
- A Mounting type
- B Size
- M CRI
- L Color temperature
- P Driver type
- 8 Power
- 2 Diffuser type
- B Body color



CONFIGURATE PRODUCT

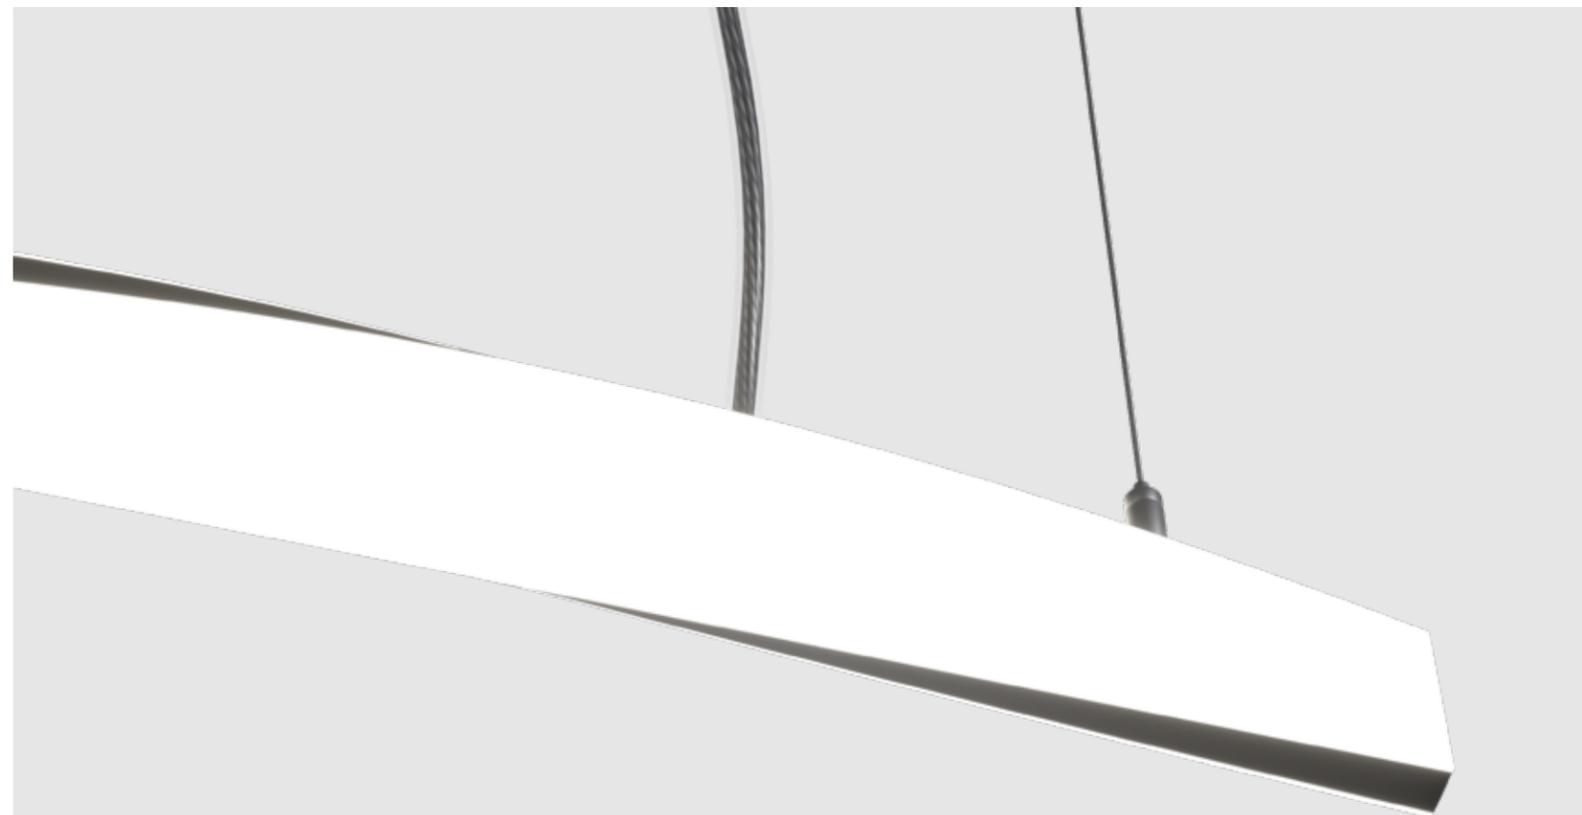



OLENA






OLENA


- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES


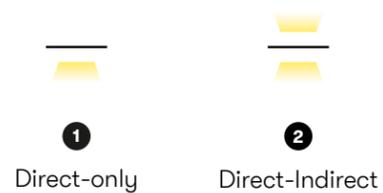


PROFILE SIZES

Direct/indirect options

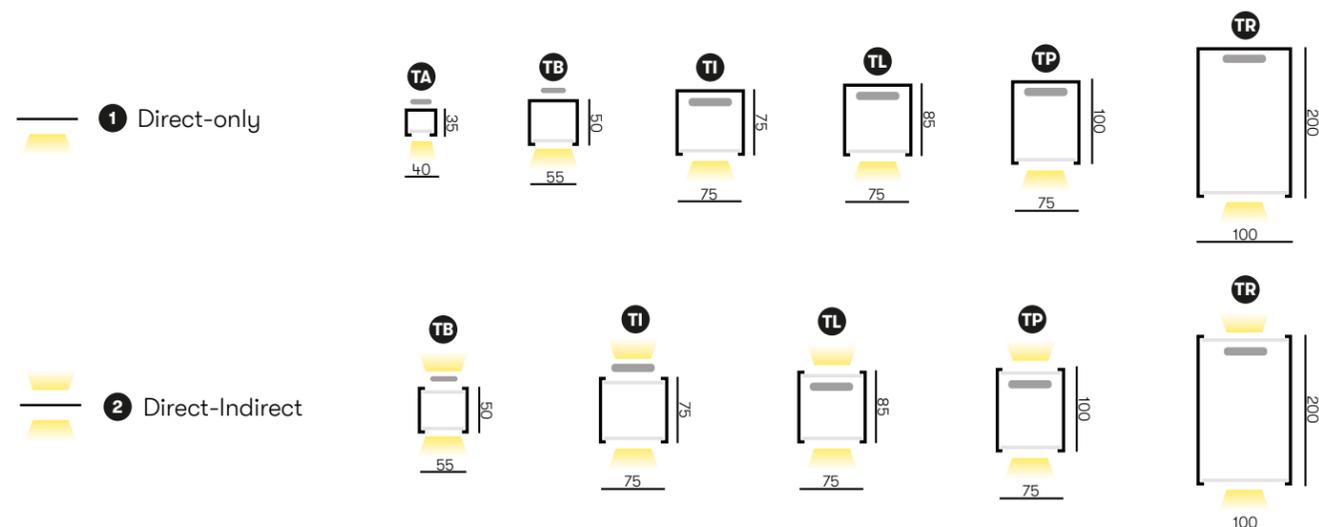

MOUNTING TYPES

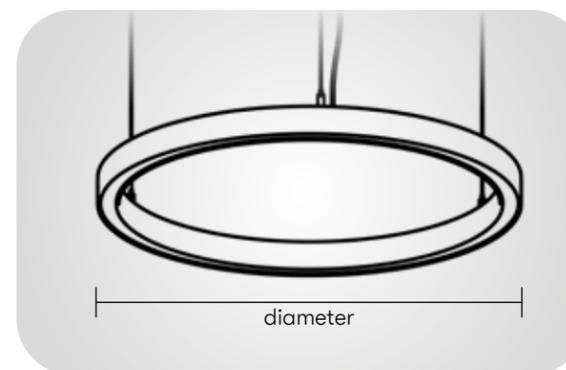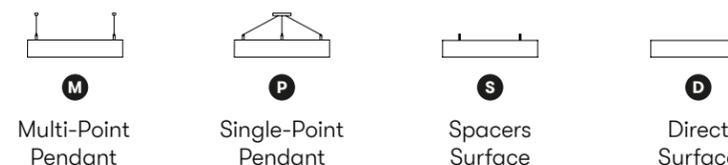

- O Product name
- L Lighting type
- 1 Profile size
- T Mounting type
- I Size
- M CRI
- D Color temperature
- H Driver type
- 8 Power
- 2 Diffuser type
- N Body color
- 6
- S
- B
- B



CONFIGURATE PRODUCT


	Size	Power*	Light Flux**
DH	Ø450	33 W	3696 lm
DJ	Ø600	43 W	4816 lm
DM	Ø750	54 W	6048 lm
QA	Ø800	58 W	6496 lm
QC	Ø1000	72 W	8064 lm
QF	Ø1200	87 W	9744 lm
QJ	Ø1500	108 W	12096 lm
QK	Ø1800	130 W	14560 lm
QL	Ø2000	145 W	16240 lm

	Size	Power*	Light Flux**
DH	Ø450	49 W	5488 lm
DJ	Ø600	65 W	7280 lm
DM	Ø750	81 W	9072 lm
QA	Ø800	87 W	9744 lm
QC	Ø1000	108 W	12096 lm
QF	Ø1200	130 W	14560 lm
QJ	Ø1500	163 W	18256 lm
QK	Ø1800	195 W	21840 lm
QL	Ø2000	217 W	24304 lm


* Calculated with 23 W/m
** Calculated at 4000K color temperature

- CRI: 8 80 CRI, 9 90 CRI
- COLOR TEMPERATURE: 2 2700 K, 3 3000 K, 4 4000 K, 1 RGBW, 5 Tunable White
- DRIVER TYPE: N ON-OFF, D DALI, P Push DIM, B Bluetooth
- POWER: 6 15 [W/m], 2 23 [W/m]
- DIFFUSER: M microprismatic, S standard (opal), L lenses

BODY COLORS

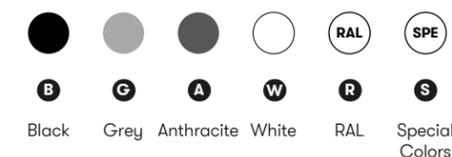

OLENA DISK

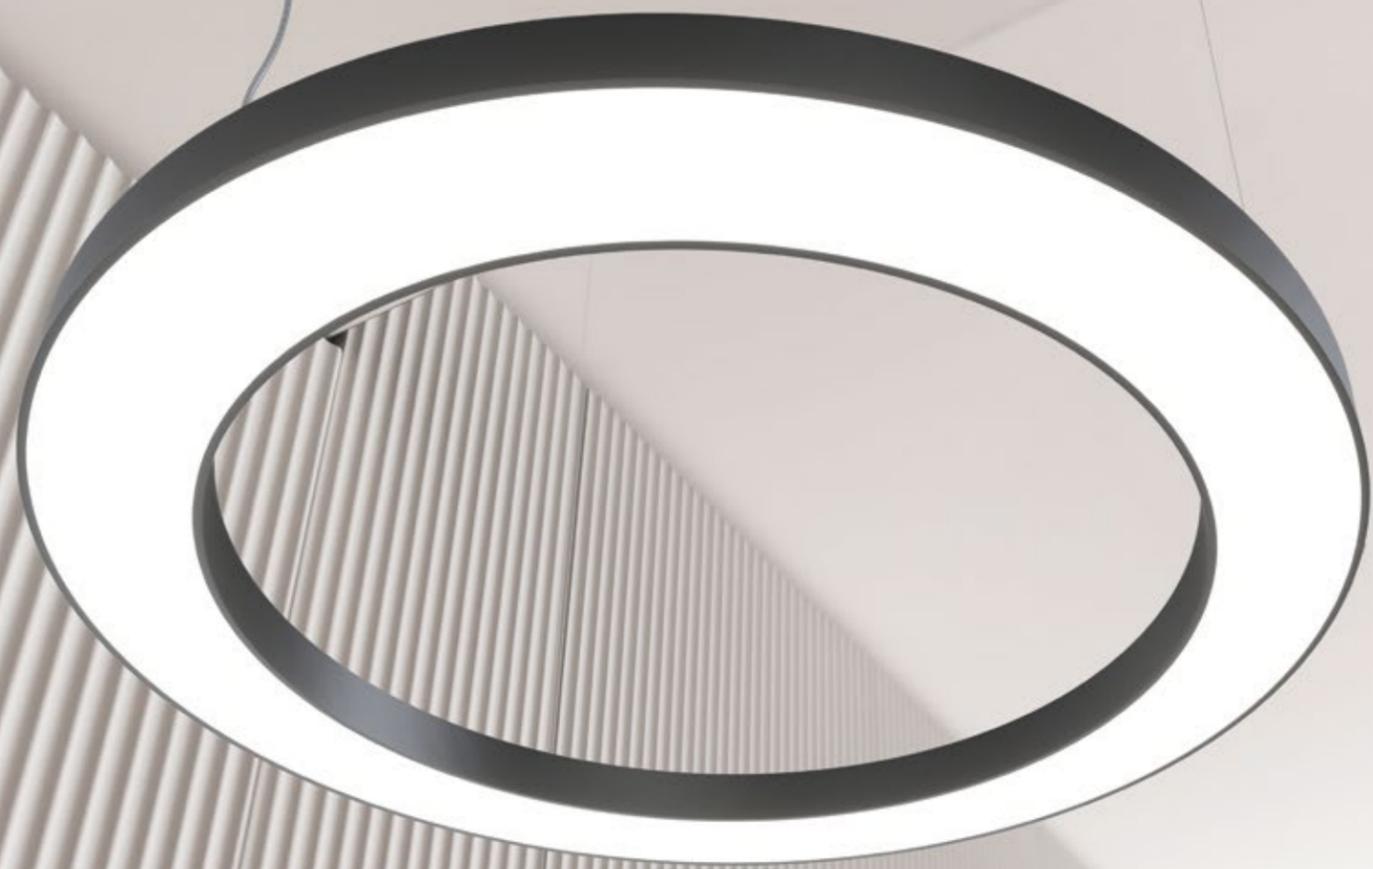





OLENA DISK

- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES




MOUNTING TYPES

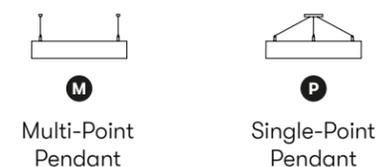

PROFILE SIZES

Direct/indirect options

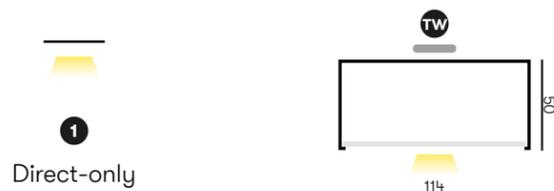


Size	Power*	Light Flux**
Ø980	74 W	8806 lm

* Calculated with 24 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	8 12 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	9 17 [W/m]	S standard (opal)
	4 4000 K	D DALI	0 24 [W/m]	L lenses
		P Push DIM		
		B Bluetooth		


BODY COLORS



- O Product name
- D Lighting type
- 1 Profile size
- N Mounting type
- W Size
- M CRI
- Q Color temperature
- P Driver type
- 8 Power
- 2 Diffuser type
- S Body color



CONFIGURATE PRODUCT

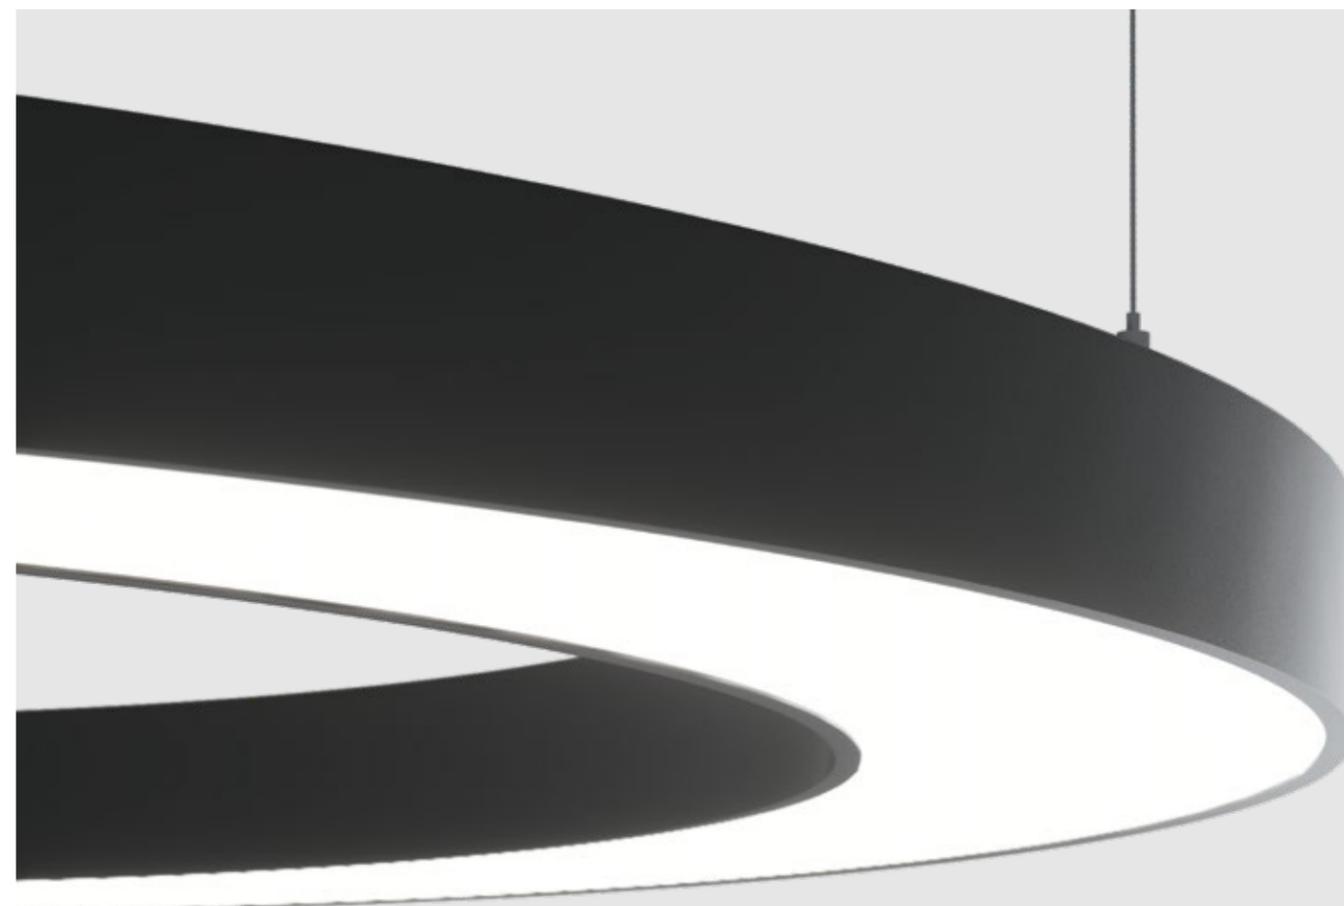




RINA



RINA


- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES


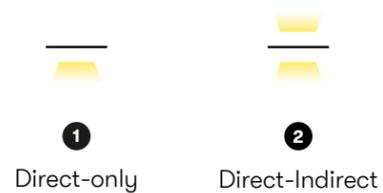


PROFILE SIZES

Direct/indirect options

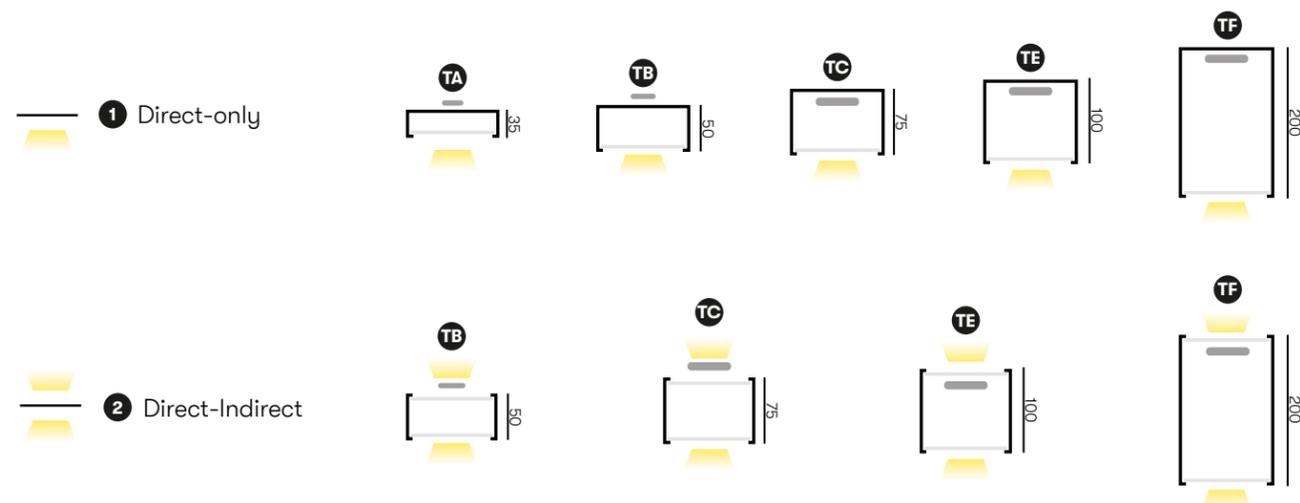

MOUNTING TYPES

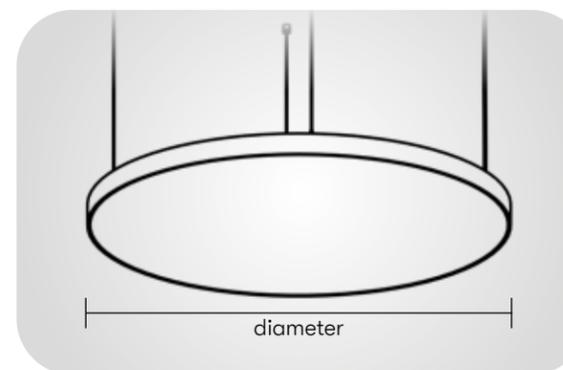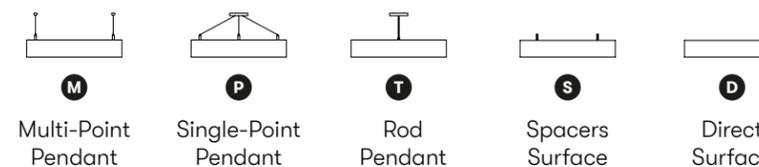

R N 1 T F M Q F 8 3 B C M B B

- Product name
- Lighting type
- Profile size
- Mounting type
- Size
- CRI
- Color temperature
- Driver type
- Power
- Diffuser type
- Body color



CONFIGURATE PRODUCT


	Size	Power	Light Flux*
DC	Ø300	23 W	2875 lm
DF	Ø400	36 W	4500 lm
DJ	Ø600	60 W	7500 lm
QA	Ø800	80 W	10000 lm
QC	Ø1000	100 W	125000 lm

	Size	Power	Light Flux*
DC	Ø300	35 W	4313 lm
DF	Ø400	54 W	5750 lm
DJ	Ø600	90 W	11250 lm
QA	Ø800	120 W	15000 lm
QC	Ø1000	150 W	18750 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI		S standard (opal)
	4 4000 K	P Push DIM		T lenses
		1 RGBW		
		5 Tunable White		
		B Bluetooth		

BODY COLORS

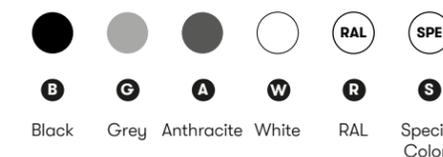



RINA DEEP




RINA DEEP

- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES




MOUNTING TYPES

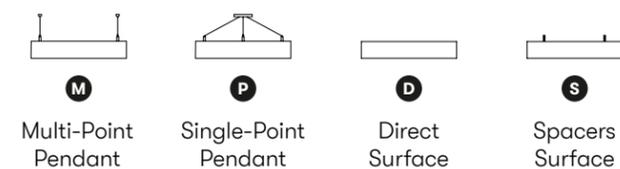

PROFILE SIZES

Direct/indirect options

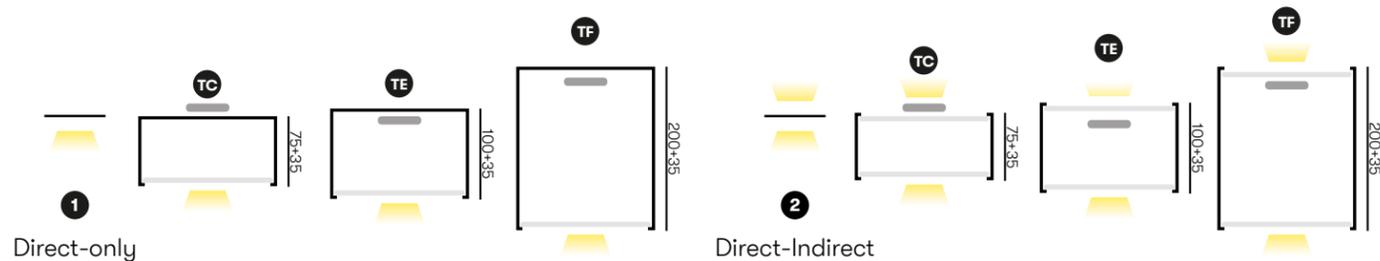


	Size	Power	Light Flux*
DC	Ø300	23 W	2875 lm
DF	Ø400	36 W	4500 lm
DJ	Ø600	60 W	7500 lm
QA	Ø800	80W	10000 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI		S standard (opal)
	4 4000 K	P Push DIM		L lenses
		5 Tunable White		
		B Bluetooth		

BODY COLORS

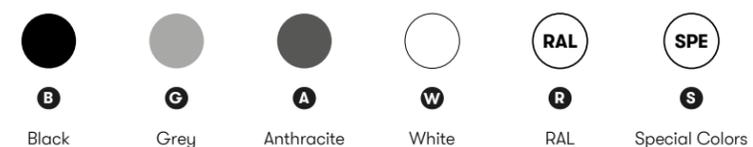

- R — Product name
- D 1 — Lighting type
- T C — Profile size
- S — Mounting type
- Q A — Size
- 8 — CRI
- 2 — Color temperature
- N — Driver type
- C S — Power
- S — Diffuser type
- B B — Body color



CONFIGURATE PRODUCT





RINA TRACK






RINA TRACK

- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES

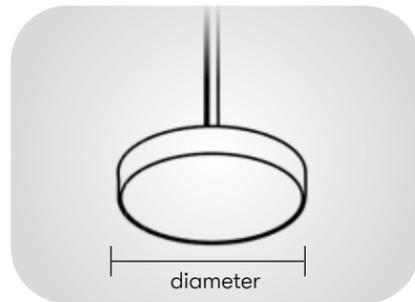

PROFILE SIZES


Direct/indirect options



internal driver



external driver




	Size	Power	Light Flux*
DU	180	18W	1800 lm
DS	220	18W	1980 lm
DS	280	23W	2530 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]
9 90 CRI	3 3000 K	5 Tunable White	D DALI	M microprismatic
	4 4000 K	P Push DIM	B Bluetooth	S standard (opal)
				L lenses

BODY COLORS

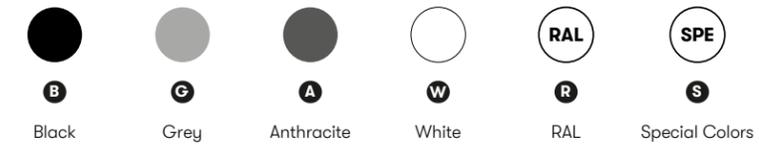

R
M
1
T
A
M
D
S
8
2
N
C
S
B
B

— Luminaire name
— Lighting type
— Profile size
— Mounting type
— Size
— CRI
— Color temperature
— Driver type
— Power
— Diffuser type
— Body color




CONFIGURATE PRODUCT





ILONA
DARK




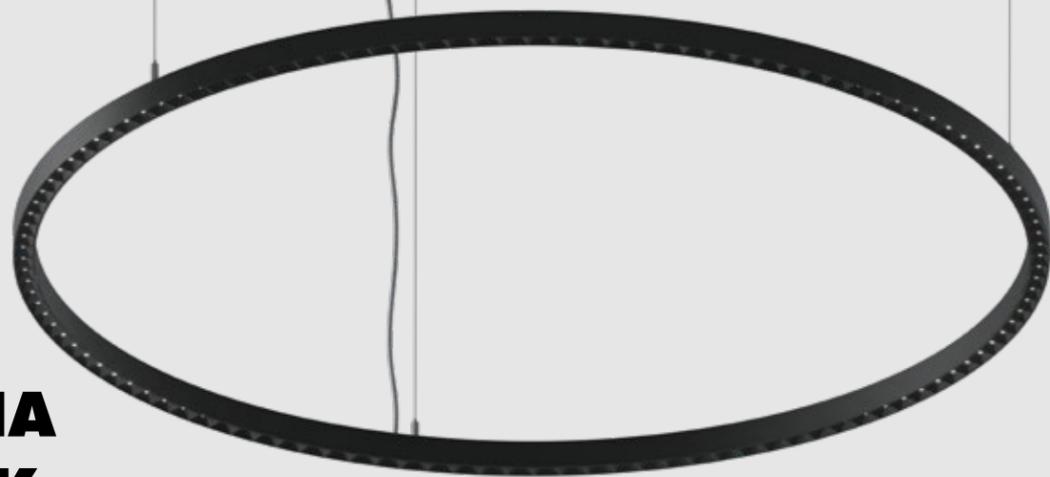


ILONA DARK

- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other Special colors on Request

LIGHTING TYPES




MOUNTING TYPES



PROFILE SIZES

Direct/indirect options




	Size	Power*	Light Flux**
DJ	Ø600	34 W	4700 lm
QF	Ø1200	46 W	6300 lm
QK	Ø1800	68 W	9400 lm

* Calculated with 15 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	4 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White		S standard (opal)
	4 4000 K	D DALI		L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

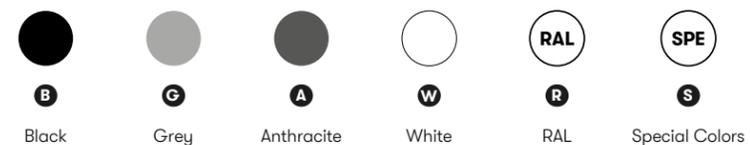

- I Product name
- D Lighting type
- 1 Profile size
- A Mounting type
- K Size
- M CRI
- D Color temperature
- J Driver type
- 8 Power
- 2 Diffuser type
- N Body color



CONFIGURATE PRODUCT



OLLIE






OLLIE



- Elliptical LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

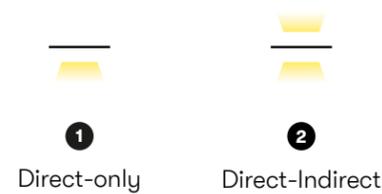


PROFILE SIZES

Direct/indirect options

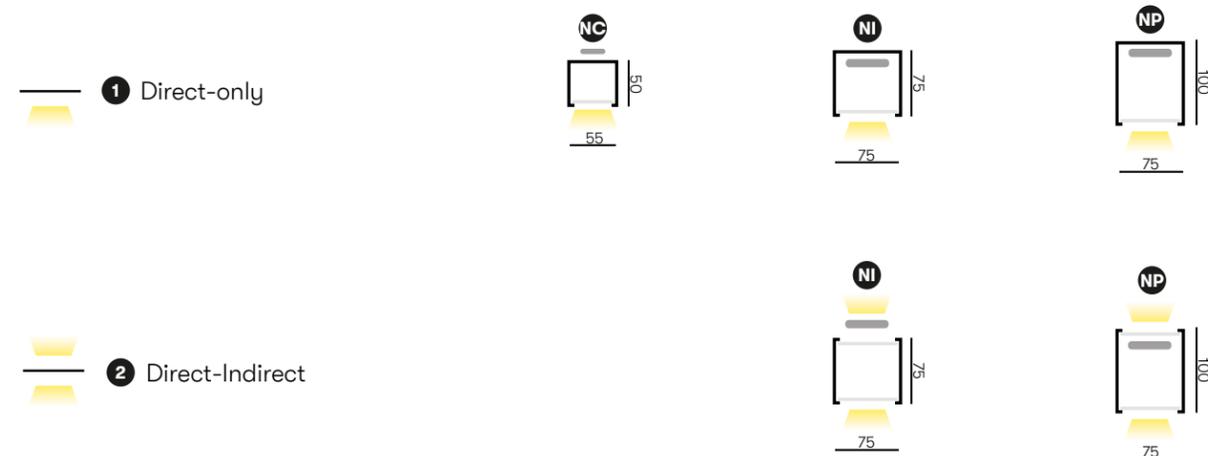

MOUNTING TYPES

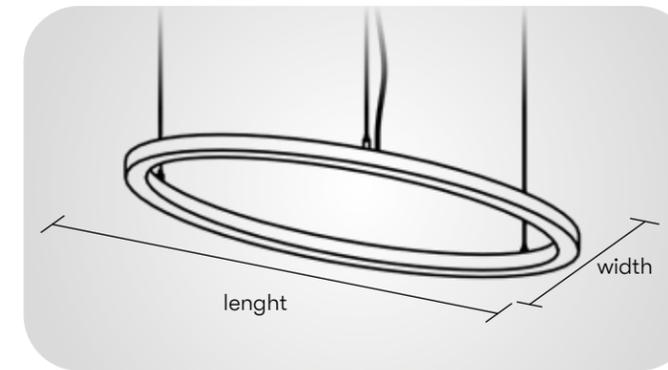

- O Product name
- E Lighting type
- 1 Profile size
- N Mounting type
- P Size
- M CRI
- B Color temperature
- G Driver type
- 8 Power
- 2 Diffuser type
- N Body color
- 2
- S
- B
- B



CONFIGURATE PRODUCT


	Size	Power*	Light Flux**
BD	1200x600	67 W	750+ lm
BF	1800x900	100 W	11200 lm
BG	2000x1000	111 W	12432 lm

	Size	Power*	Light Flux**
BD	1200x600	100 W	11200 lm
BF	1800x900	151 W	16912 lm
BG	2000x1000	167 W	1870+ lm

* Calculated with 23 W/m
 ** Calculated at 4000K color temperature

- CRI: 8 80 CRI, 9 90 CRI
- COLOR TEMPERATURE: 2 2700 K, 3 3000 K, 4 4000 K, 1 RGBW, 5 Tunable White
- DRIVER TYPE: N ON-OFF, D DALI, P Push DIM, B Bluetooth
- POWER: 2 23 [W/m]
- DIFFUSER: M microprismatic, S standard (opal), L lenses

BODY COLORS

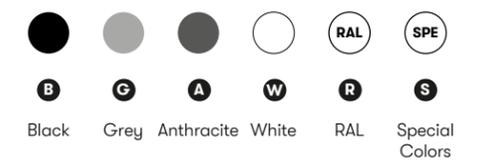



ELLIE








ELLIE

- Elliptical LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

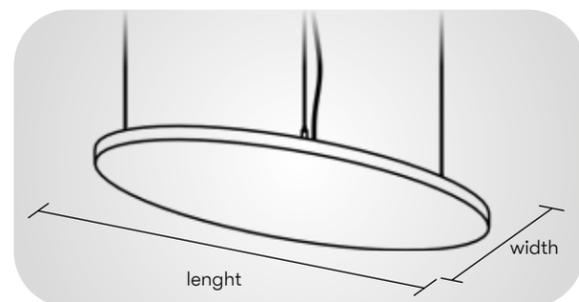
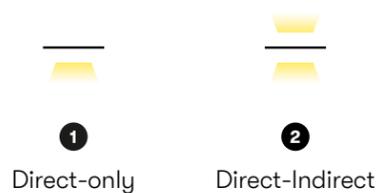


MOUNTING TYPES

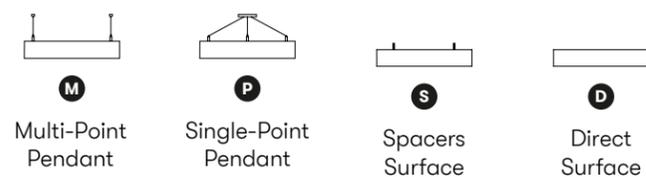

PROFILE SIZES

Direct/indirect options

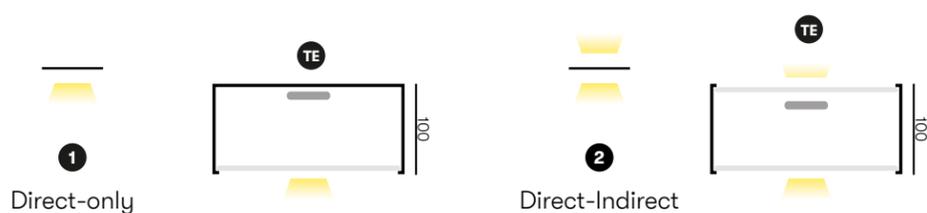


		Size	Power*	Light Flux**
	BB	1000x500	65 W	5850 lm
	BE	1400x700	80 W	7200 lm
	BB	1000x500	98 W	5850 lm
	BE	1400x700	120 W	7200 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	S standard (opal)
	4 4000 K	P Push DIM	C Custom [W/m]	l lenses
		B Bluetooth		

BODY COLORS



E
E
1
T
E
M
B
E
8
3
N
C
S
B
B

- Product name
- Lighting type
- Profile size
- Mounting type
- Size
- CRI
- Color temperature
- Driver type
- Power
- Diffuser type
- Body color



CONFIGURATE PRODUCT





ANNA O








ANNA ○

- Ring LED luminaire
- Aluminum body
- Inward light
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES




MOUNTING TYPES

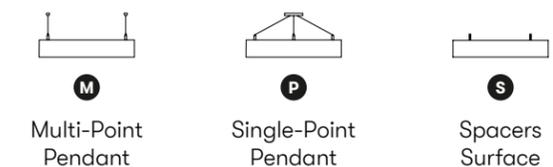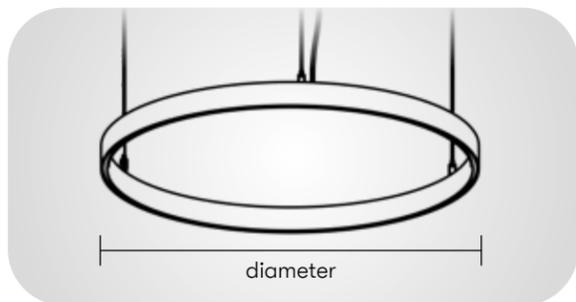

PROFILE SIZES

Direct/indirect options

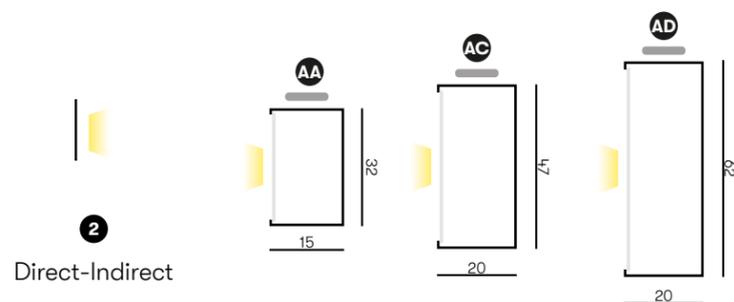


	Size	Power*	Light Flux**
QA	Ø800	75 W	6750 lm
QC	Ø1000	94 W	8460 lm
QF	Ø1200	113 W	10170 lm
QJ	Ø1500	141 W	12690 lm
QK	Ø1800	170 W	15300 lm

* Calculated with 30 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI	3 30[W/m]	S standard (opal)
	4 4000 K	P Push DIM		L lenses
		B Bluetooth		

BODY COLORS



- A Luminaire name
- O Lighting type
- 2 Profile size
- C Mounting type
- M Size
- Q K CRI
- 8 2 Color temperature
- N Driver type
- 3 Power
- S Diffuser type
- B B Body color



CONFIGURATE PRODUCT





ANNA INVERSE








ANNA INVERSE

- Ring LED luminaire
- Aluminum body
- Outward Light
- Custom sizes available on request
- Surface in white/black/grey/antracite
- RAL & other special colors on request

LIGHTING TYPES

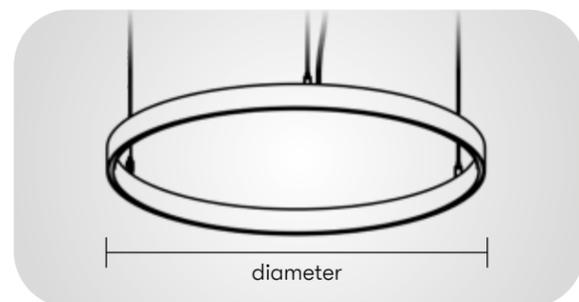



MOUNTING TYPES

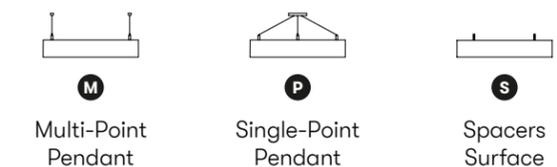

PROFILE SIZES

Direct/indirect options

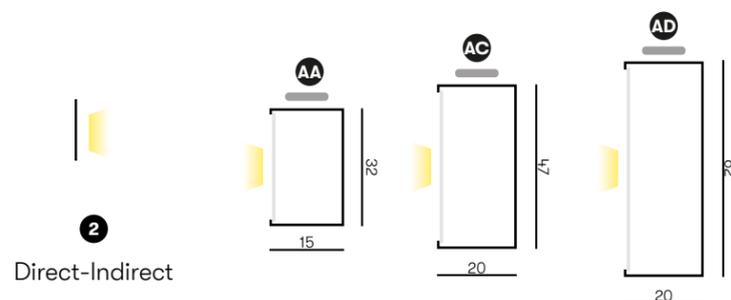


	Size	Power*	Light Flux**
QA	Ø800	75 W	6750 lm
QC	Ø1000	94 W	8460 lm
QF	Ø1200	113 W	10170 lm
QJ	Ø1500	141 W	12690 lm
QK	Ø1800	170 W	15300 lm

* Calculated with 30 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI	3 30[W/m]	S standard (opal)
	4 4000 K	P Push DIM		L lenses
		B Bluetooth		


BODY COLORS

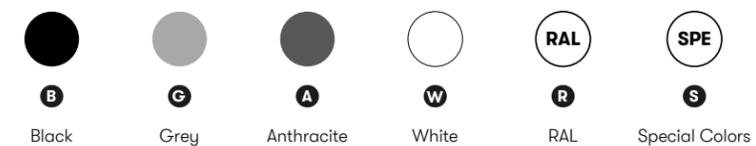

- A Luminaire name
- I Lighting type
- 2 Profile size
- C Mounting type
- M Size
- Q CRI
- K Color temperature
- 8 Driver type
- 2 Power
- N Diffuser type
- 3 Body color
- S
- B



CONFIGURATE PRODUCT

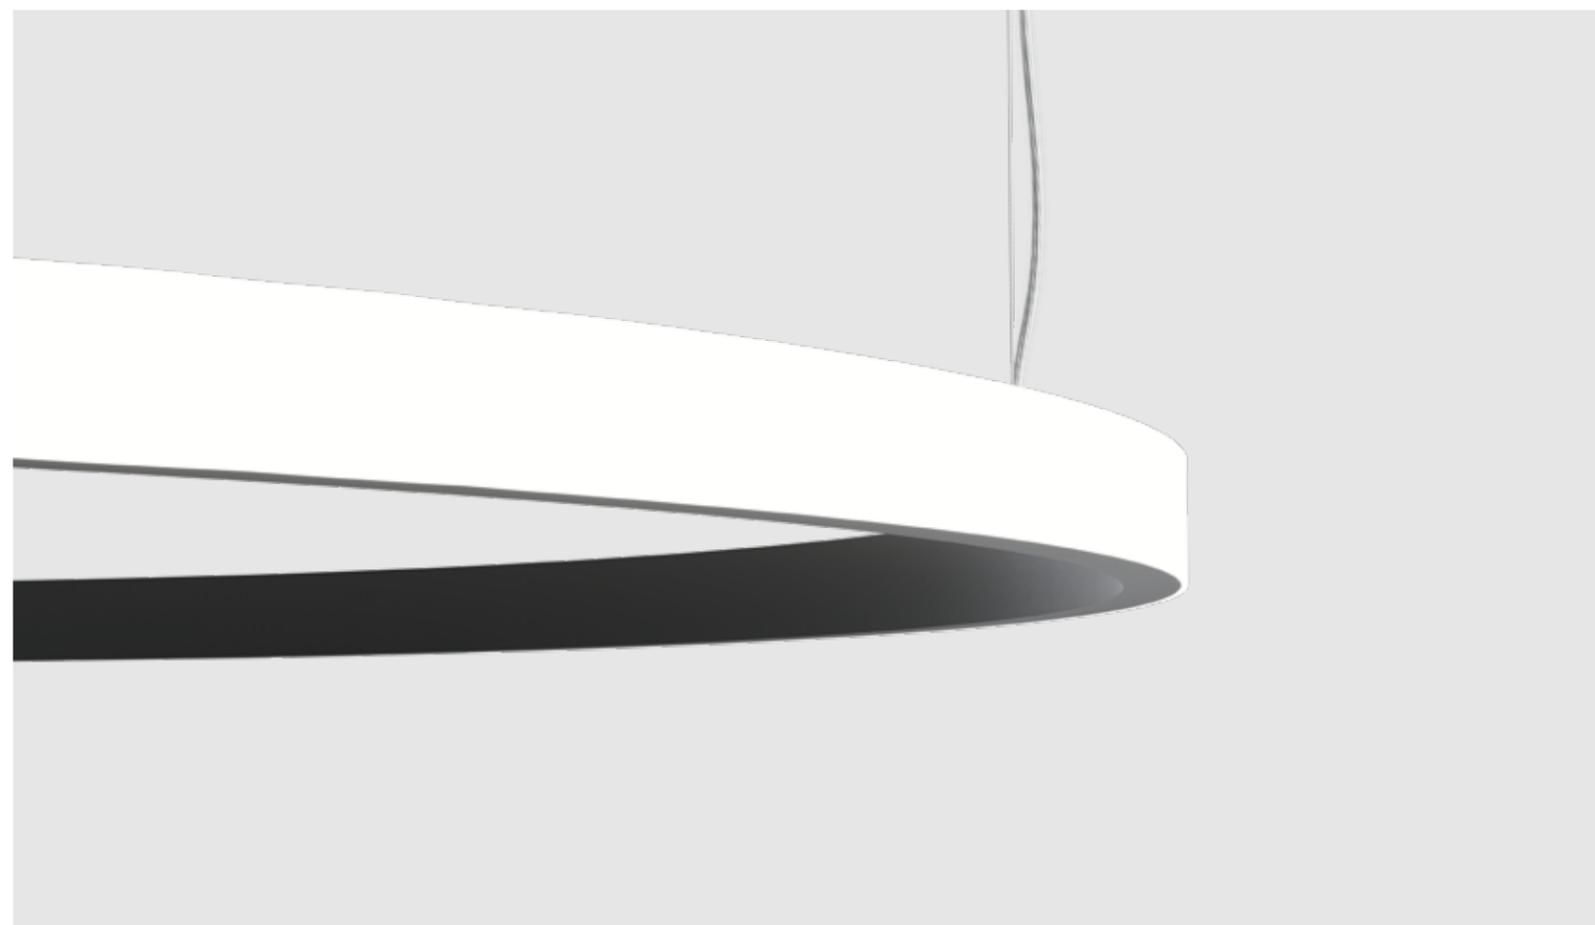



HANNAH O





HANNAH O


- Ring LED luminaire
- Aluminum body
- Inward & outward light
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



2

Direct-Indirect

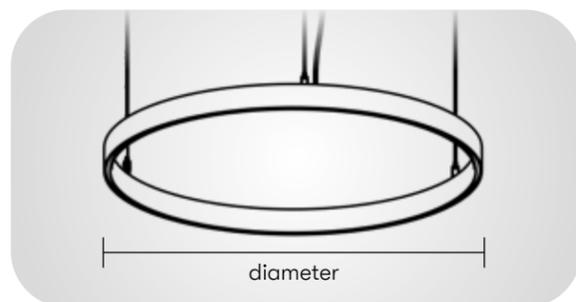


MOUNTING TYPES



M

Multi-Point
Pendant



P

Single-Point
Pendant



S

Spacers
Surface

PROFILE SIZES

Direct/indirect options



internal driver





external driver



2

Direct-Indirect



QA

Size

Ø800

Power*

58 W

Light Flux**

5220 lm

QC

Ø1000

72 W

6480 lm

QF

Ø1200

87 W

7830 lm

QJ

Ø1500

108 W

9720 lm

QK

Ø1800

130 W

11700 lm

* Calculated with 23 W/m

** Calculated at 4000K color temperature

CRI

8 80 CRI

9 90 CRI

COLOR TEMPERATURE

2 2700 K

3 3000 K

4 4000 K

1 RGBW

5 Tunable White

DRIVER TYPE

N ON-OFF

D DALI

P Push DIM

B Bluetooth

POWER

2 23 [W/m]

3 30[W/m]

DIFFUSER

M microprismatic

S standard (opal)

L lenses

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



R

RAL



S

Special Colors

H
O
2
A
B
M
Q
K
8
2
N
3
S
B
B

Luminaire name

Lighting type

Profile size

Mounting type

Size

CRI

Color temperature

Driver type

Power

Diffuser type

Body color




CONFIGURATE PRODUCT



ANNA
TRIANGLE



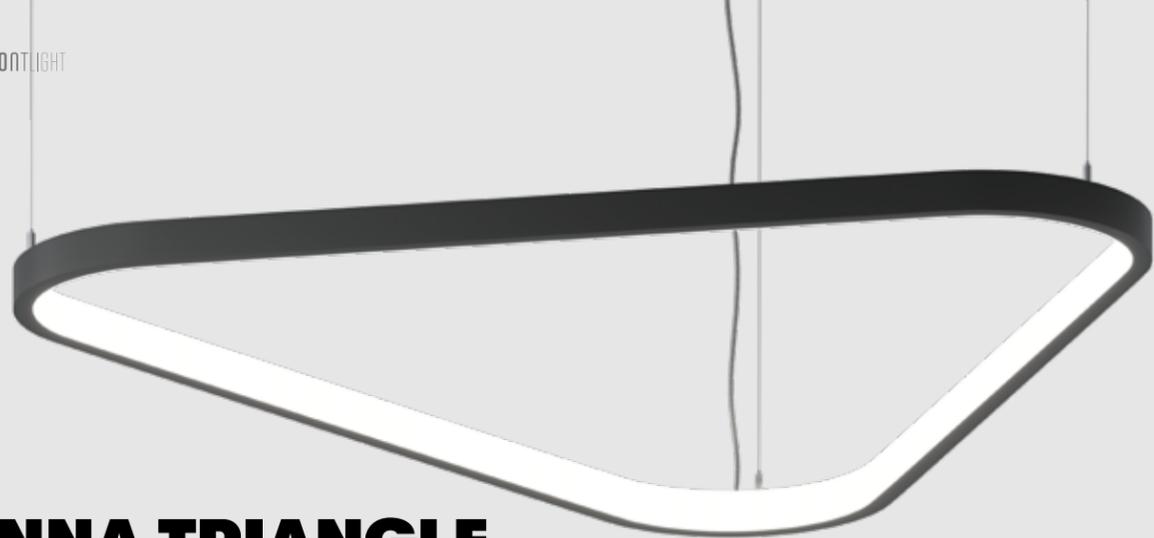

ANNA TRIANGLE


- Triangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES




2

Direct-Indirect

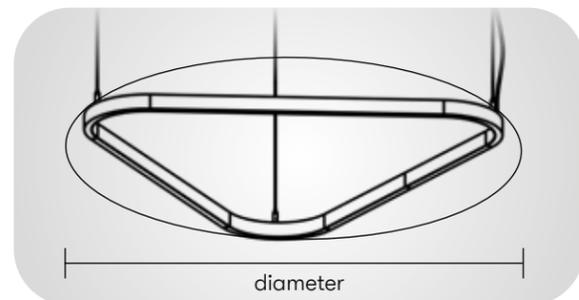


MOUNTING TYPES



M

Multi-Point
Pendant



P

Single-Point
Pendant



S

Spacers
Surface

PROFILE SIZES

Direct/indirect options



internal driver




external driver



2

Direct-Indirect



15



15



QA

Size

Ø800

Power*

50 W

Light Flux**

4500 lm

QF

Ø1200

75 W

6750 lm

QH

Ø1400

88 W

7920 lm

QK

Ø1800

113 W

10170 lm

* Calculated with 20 W/m

** Calculated at 4000K color temperature

CRI

8

80 CRI

COLOR TEMPERATURE

2

2700 K

1

RGBW

DRIVER TYPE

N

ON-OFF

D

DALI

P

Push DIM

B

Bluetooth

POWER

4

20 [W/m]

5

25 [W/m]

DIFFUSER

1

microprismatic

2

standard (opal)

3

lenses

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors



CONFIGURATE PRODUCT

A
A
2
A
A
M
Q
A
8
2
N
4
S
B
B

Product name
Lighting type
Profile size
Mounting type
Size
CRI
Color temperature
Driver type
Power
Diffuser type
Body color





SWAN






SWAN

- Triangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES




MOUNTING TYPES

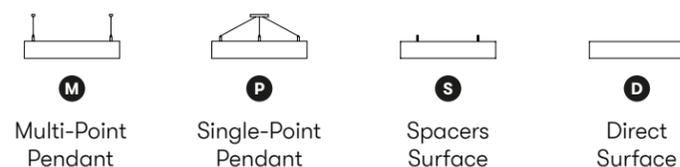

PROFILE SIZES

Direct/indirect options

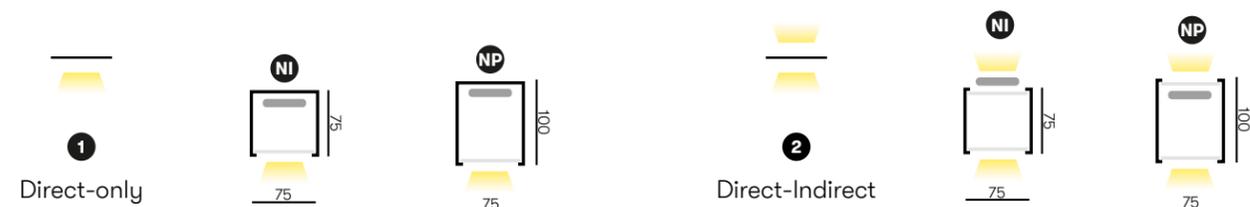


	Size	Power*	Light Flux**
Direct-only	DN Ø771	46 W	4140 lm
	QE Ø1033	62 W	5580 lm
	QI Ø1426	86 W	7740 lm
Direct-Indirect	DN Ø771	69 W	6210 lm
	QE Ø1033	93 W	8370 lm
	QI Ø1426	128 W	11520 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K	P Push DIM	3 30 [W/m]	L lenses
		5 Tunable White		
		B Bluetooth		

BODY COLORS



- S Luminaire name
- W Lighting type
- 1 Profile size
- N Mounting type
- I Size
- M CRI
- D Color temperature
- N Driver type
- 8 Power
- 2 Diffuser type
- S Body color




CONFIGURATE PRODUCT






SWELLA

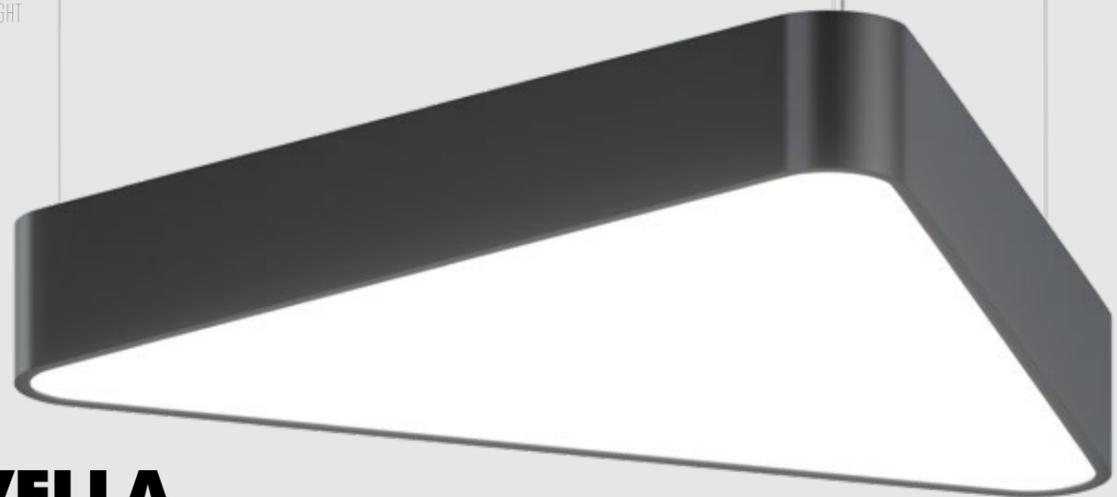


SWELLA

- Triangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

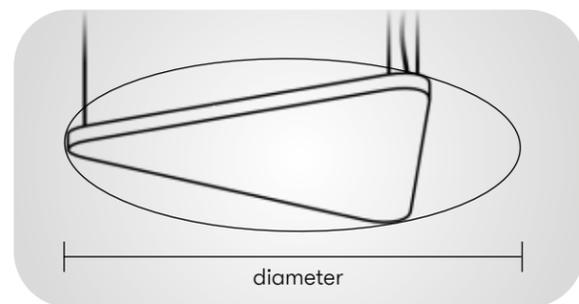


MOUNTING TYPES

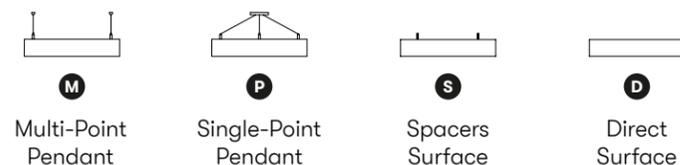

PROFILE SIZES

Direct/indirect options

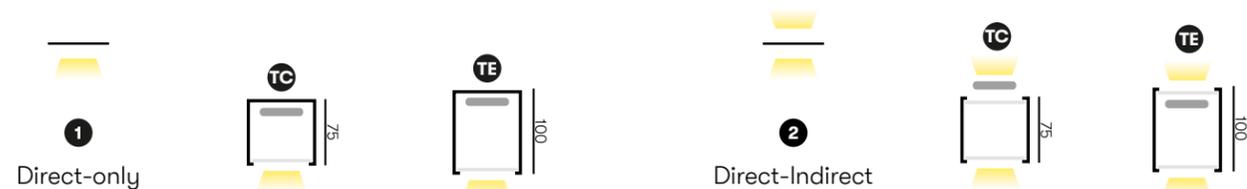


	Size	Power	Light Flux*
DN	Ø771	60 W	7500 lm
QE	Ø1033	80 W	10000 lm
DN	Ø771	90 W	7500 lm
QE	Ø1033	120 W	10000 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI		S standard (opal)
	4 4000 K	P Push DIM		L lenses
		5 Tunable White		
		B Bluetooth		


BODY COLORS

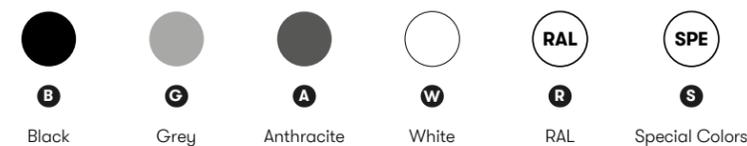

- S Luminaire name
- L Lighting type
- 1 Profile size
- T Mounting type
- E Size
- M CRI
- D Color temperature
- N Driver type
- 8 Power
- 2 Diffuser type
- N
- C
- S
- B Body color



CONFIGURATE PRODUCT

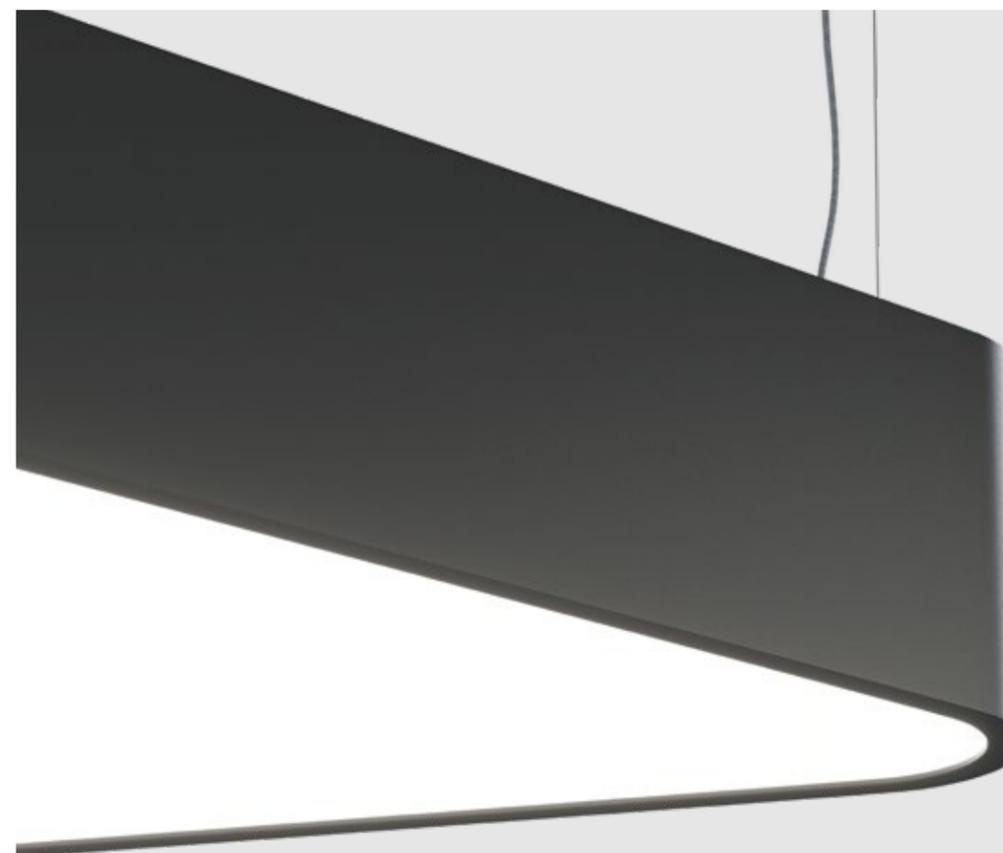

ANNA RECTANGLE





ANNA RECTANGLE


- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES




2

Direct-Indirect

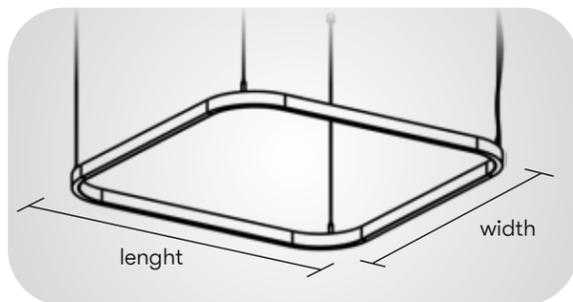


MOUNTING TYPES



M

Multi-Point
Pendant



P

Single-Point
Pendant



S

Spacers
Surface

PROFILE SIZES

Direct/indirect options



internal driver




external driver



2

Direct-Indirect



AO

Size

800x800

Power*

60 W

Light Flux**

4500 lm

AL

1000x1000

76 W

5700 lm

AM

1200x1200

92 W

6900 lm

AN

1500x1500

116 W

8700 lm

2000x2000

156 W

11700 lm

* Calculated with 20 W/m

** Calculated at 4000K color temperature

CRI

8 80 CRI

9 90 CRI

COLOR TEMPERATURE

2 2700 K

3 3000 K

4 4000 K

1 RGBW

5 Tunable White

DRIVER TYPE

N ON-OFF

D DALI

P Push DIM

B Bluetooth

POWER

4 20 [W/m]

5 25 [W/m]

DIFFUSER

M microprismatic

S standard (opal)

L lenses

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors



CONFIGURATE PRODUCT


- A Product name
- R Lighting type
- 2 Profile size
- A Mounting type
- A Size
- M CRI
- O Color temperature
- 8 Driver type
- 2 Power
- N Diffuser type
- 4 Body color
- S
- B






TILIA



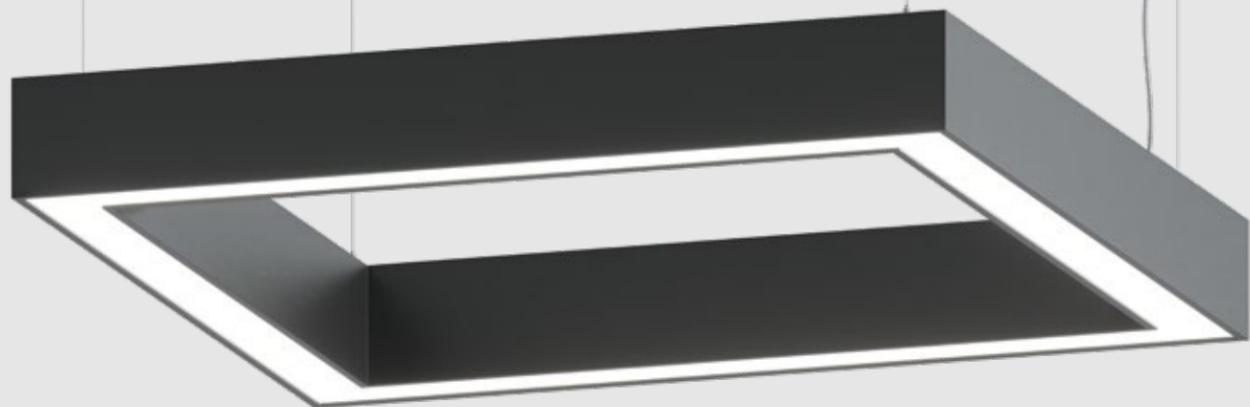


TILIA


- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

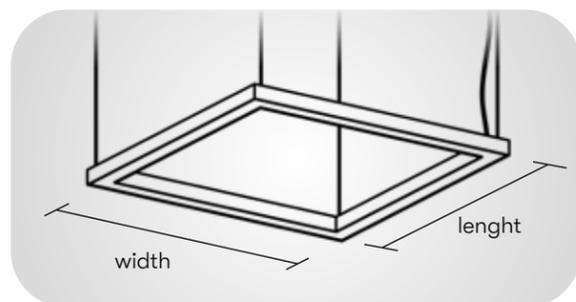

LIGHTING TYPES


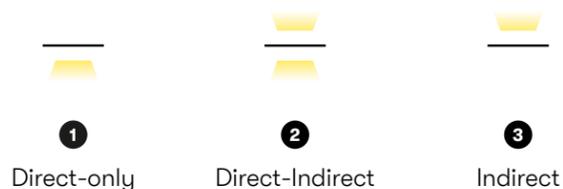


MOUNTING TYPES

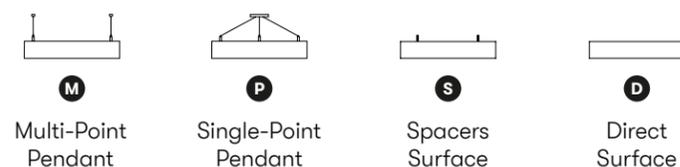

PROFILE SIZES

Direct/indirect options

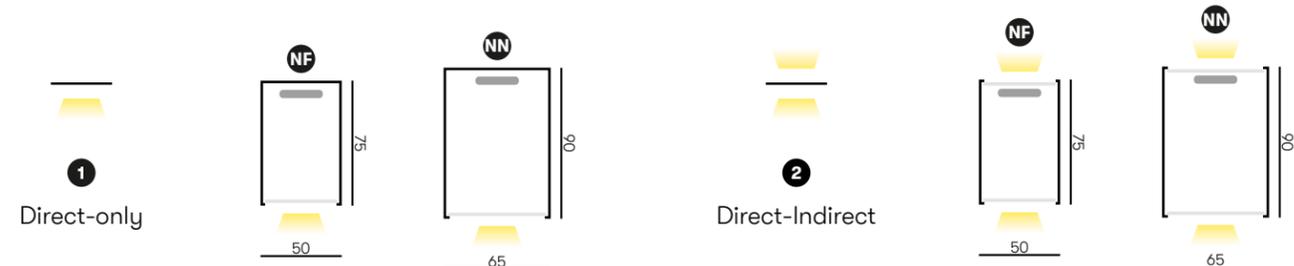


	Size	Power*	Light Flux**
AA	600X600	55 W	6160 lm
	1200X600	83 W	9296 lm
BD	600X600	83 W	9296 lm
	1200X600	124 W	13888 lm
AA	600X600	55 W	6160 lm
	1200X600	83 W	9296 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	6 15 [W/m]	M micropismatic
9 90 CRI	3 3000 K	5 Tunable White	2 23 [W/m]	S standard (opal)
	4 4000 K	D DALI	3 30 [W/m]	L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

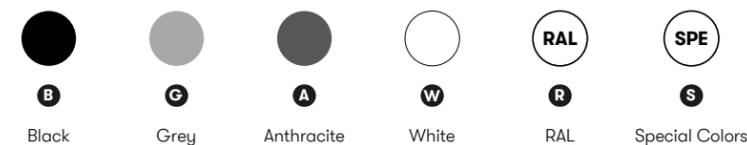

T Luminaire name
L Lighting type
1 Profile size
NF Mounting type
M Size
A CRI
8 Color temperature
2 Driver type
N Power
3 Diffuser type
S Body color




CONFIGURATE PRODUCT






MILIA

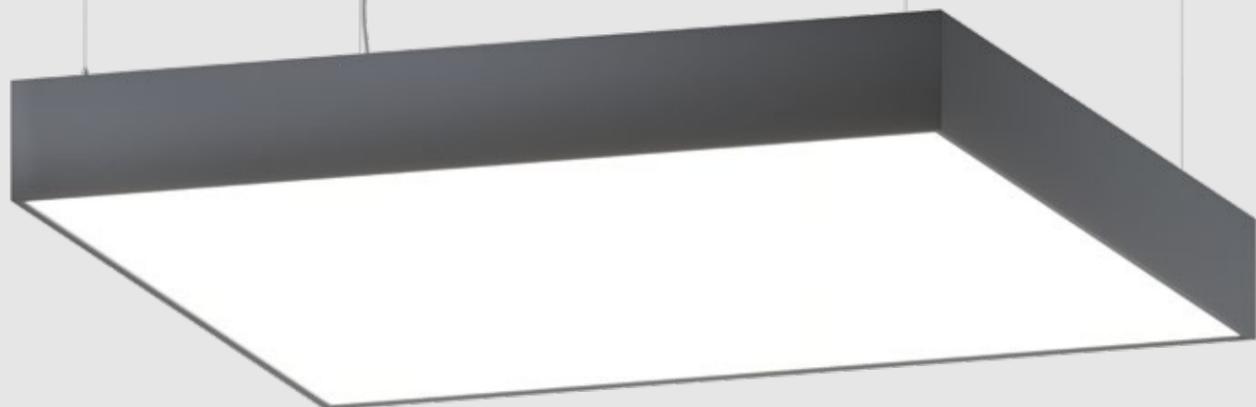


MILIA


- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

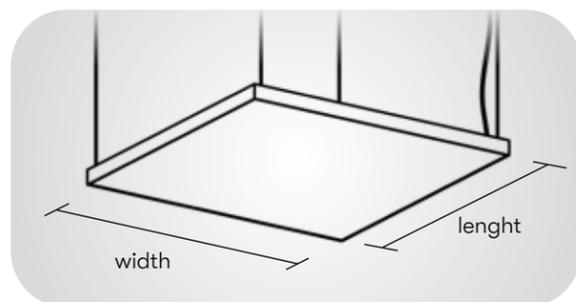

LIGHTING TYPES


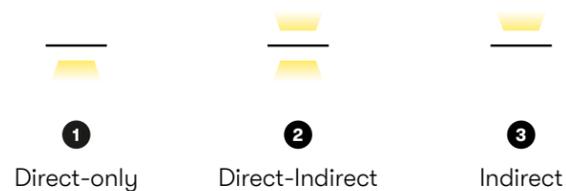


MOUNTING TYPES

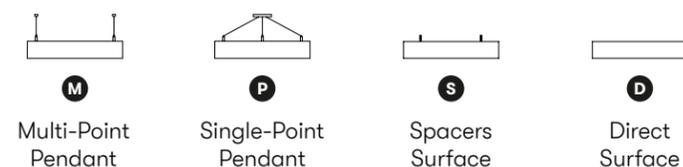

PROFILE SIZES

Direct/indirect options

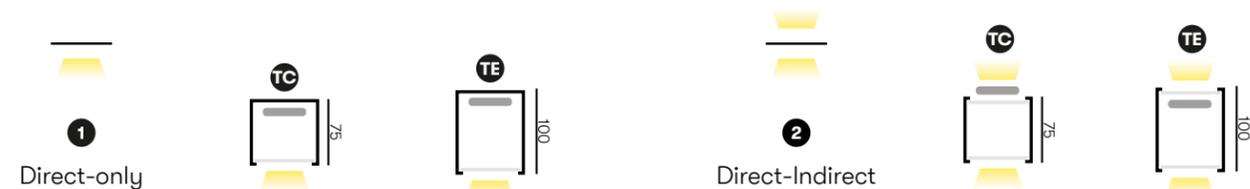

	Size	Power	Light Flux*
AA	600X600	60 W	7500 lm
AC	880X880	80 W	10000 lm
AF	1160X1160	100 W	12503 lm
AA	600X600	90 W	7500 lm
AC	880X880	120 W	10000 lm
AF	1160X1160	150 W	12503 lm
AA	600X600	60 W	7500 lm
AC	880X880	80 W	10000 lm
AF	1160X1160	100 W	12503 lm

* Calculated at 4000K color temperature

- M Luminaire name
- L Lighting type
- 1 Profile size
- C Mounting type
- M Size
- A Size
- F Size
- 8 CRI
- 2 Color temperature
- N Driver type
- C Power
- S Diffuser type
- B Body color
- B Body color




CONFIGURATE PRODUCT

BODY COLORS

- CRI
 - 8 80 CRI
 - 9 90 CRI
- COLOR TEMPERATURE
 - 2 2700 K
 - 3 3000 K
 - 4 4000 K
- DRIVER TYPE
 - 1 RGBW
 - 5 Tunable White
- POWER
 - C Custom [W/m]
- DIFFUSER
 - M microprismatic
 - S standard (opal)
 - L lenses

- Black
- Grey
- Anthracite
- White
- RAL
- Special Colors

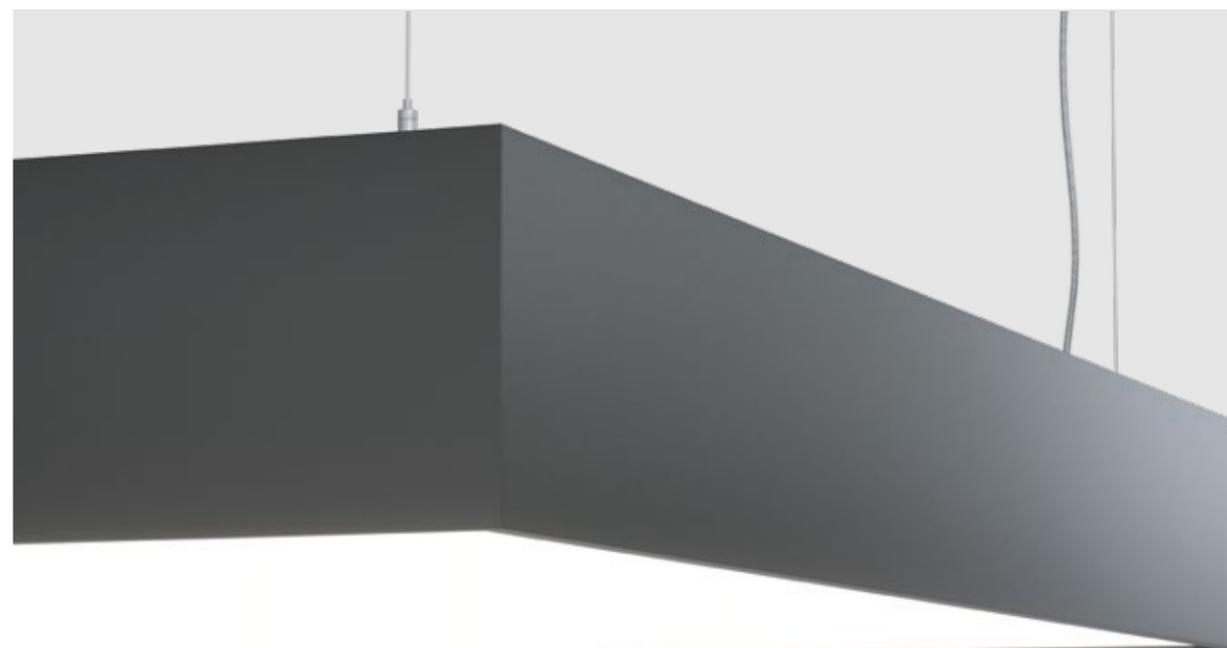




PAULA






PAULA


- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

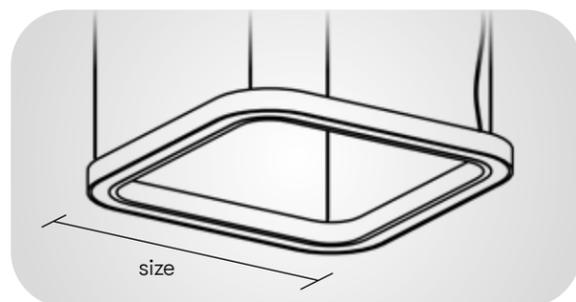

LIGHTING TYPES

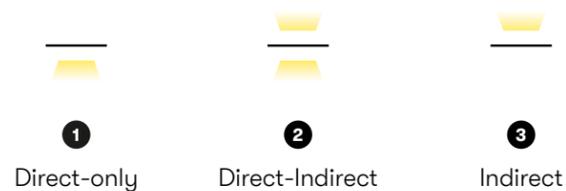

MOUNTING TYPES

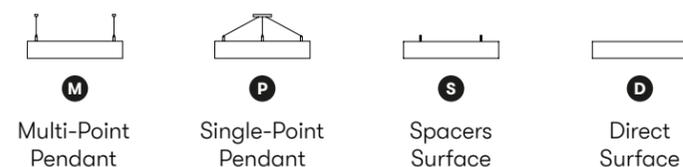

PROFILE SIZES

Direct/indirect options



	Size	Power*	Light Flux**
1	AB 670X670	62 W	6944 lm
	AD 950X950	87 W	9744 lm
	AG 1230X1230	113 W	12656 lm
2	AB 670X670	92 W	10304 lm
	AD 950X950	131 W	14672 lm
	AG 1230X1230	170 W	19040 lm
3	AB 670X670	62 W	6944 lm
	AD 950X950	87 W	9744 lm
	AG 1230X1230	113 W	12656 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

P Luminaire name
L Lighting type
1 Profile size
I Mounting type
M Mounting type
A Size
B Size
8 CRI
2 Color temperature
N Driver type
6 Power
S Diffuser type
B Body color
B Body color




CONFIGURATE PRODUCT

BODY COLORS

- CRI: 8 80 CRI, 9 90 CRI
- COLOR TEMPERATURE: 2 2700 K, 3 3000 K, 4 4000 K
- DRIVER TYPE: 1 RGBW, 5 Tunable White
- DIFFUSER: M microprismatic, S standard (opal), L lenses
- POWER: 6 15 [W/m], 2 23 [W/m], 3 30 [W/m]
- DRIVER TYPE: N ON-OFF, D DALI, P Push DIM, B Bluetooth

- Black (B)
- Grey (G)
- Anthracite (A)
- White (W)
- RAL (R)
- Special Colors (SPE)

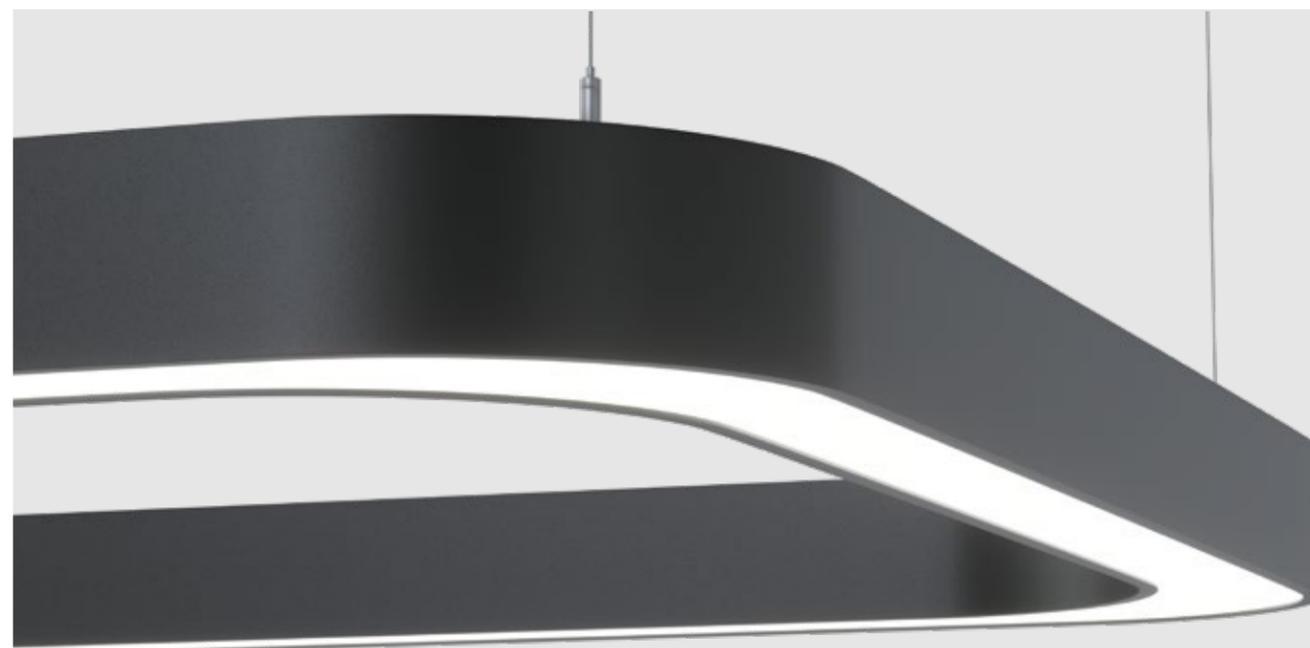




PAMELA






PAMELA


- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

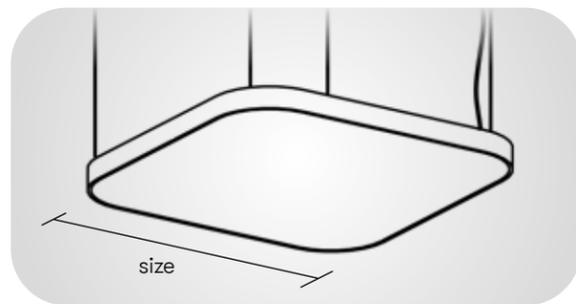

LIGHTING TYPES

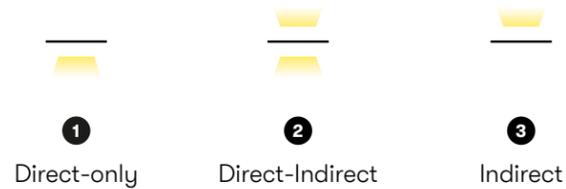


MOUNTING TYPES

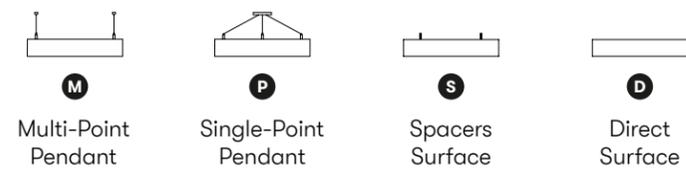

PROFILE SIZES

Direct/indirect options



	Size	Power*	Light Flux*
1	AA 600X600	60 W	7500 lm
	AC 880X880	80 W	10000 lm
	AF 1160X1160	100 W	12503 lm
2	AA 600X600	90 W	7500 lm
	AC 880X880	120 W	10000 lm
	AF 1160X1160	150 W	12503 lm
3	AA 600X600	60 W	7500 lm
	AC 880X880	80 W	10000 lm
	AF 1160X1160	100 W	12503 lm

* Calculated at 4000K color temperature



P Luminaire name
M Lighting type
1 Profile size
T Mounting type
C Size
M CRI
A Color temperature
A Driver type
8 Power
2 Diffuser type
N Body color
C
S
B
B



CONFIGURATE PRODUCT

BODY COLORS

- CRI: 8 80 CRI, 9 90 CRI
- COLOR TEMPERATURE: 2 2700 K, 3 3000 K, 4 4000 K
- 1 RGBW, 5 Tunable White
- DRIVER TYPE: N ON-OFF, D DALI, P Push DIM, B Bluetooth
- POWER: C Custom [W/m]
- DIFFUSER: M microprismatic, S standard (opal), L lenses

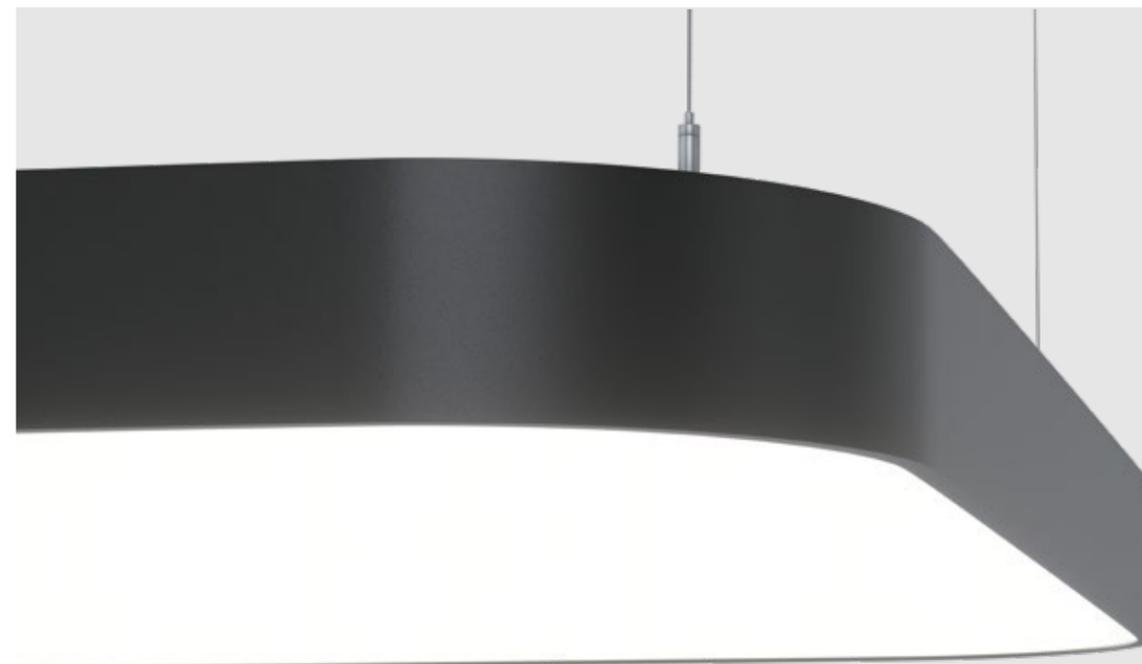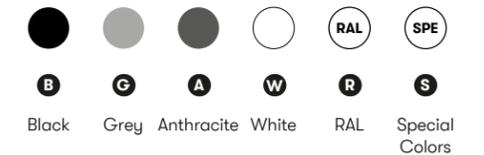



ANNA
HEXAGON



ANNA HEXAGON


- Hexagonal LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES




2

Direct-Indirect

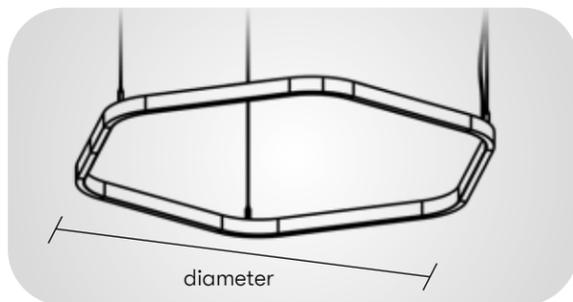


MOUNTING TYPES



M

Multi-Point
Pendant



P

Single-Point
Pendant



S

Spacers
Surface

PROFILE SIZES

Direct/indirect options



internal driver




external driver



2

Direct-Indirect



QA

Size

Ø800

Power*

50 W

Light Flux**

4500 lm

QF

Ø1200

75 W

6750 lm

QH

Ø1400

88 W

7920 lm

QK

Ø1800

113 W

10170 lm

* Calculated with 20 W/m

** Calculated at 4000K color temperature

CRI

8 80 CRI

9 90 CRI

COLOR TEMPERATURE

2 2700 K

3 3000 K

4 4000 K

1 RGBW

5 Tunable White

DRIVER TYPE

N ON-OFF

D DALI

P Push DIM

B Bluetooth

POWER

4 20 [W/m]

5 25 [W/m]

DIFFUSER

1 microprismatic

5 standard (opal)

1 lenses

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



R

RAL



S

Special Colors



CONFIGURATE PRODUCT

A
H
2
A
A
M
Q
K
8
2
N
4
S
B
B

Product name

Lighting type

Profile size

Mounting type

Size

CRI

Color temperature

Driver type

Power

Diffuser type

Body color






XARA






XARA


- Hexagonal LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

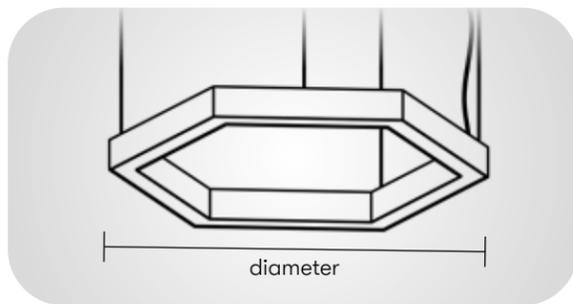

LIGHTING TYPES

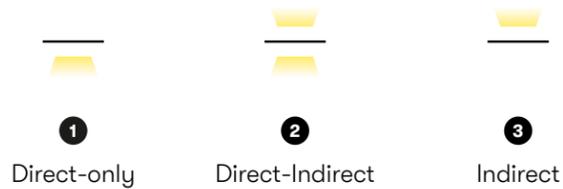


MOUNTING TYPES

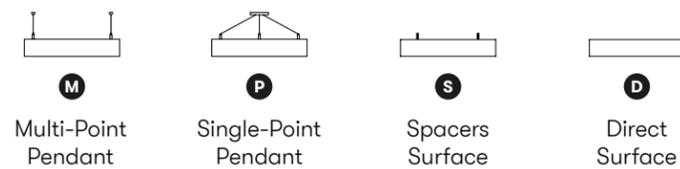

PROFILE SIZES

Direct/indirect options

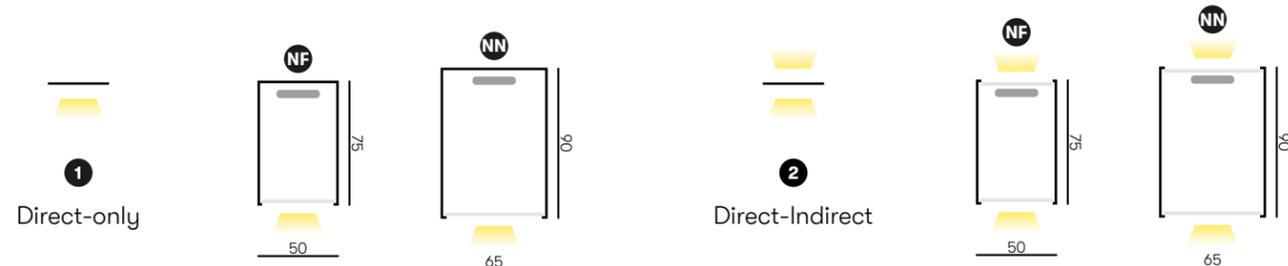

	Size	Power*	Light Flux**
Direct-only	DP Ø625	43 W	4816 lm
	QG Ø1250	86 W	9632 lm
	QK Ø1800	124 W	13888 lm
	QM Ø2370	164 W	18368 lm
Direct-Indirect	DP Ø625	65 W	7280 lm
	QG Ø1250	129 W	14448 lm
	QK Ø1800	186 W	20832 lm
	QM Ø2370	245 W	27440 lm
Indirect	DP Ø625	43 W	4816 lm
	QG Ø1250	86 W	9632 lm
	QK Ø1800	124 W	13888 lm
	QM Ø2370	164 W	18368 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

- X Luminaire name
- A Lighting type
- 1 Profile size
- N Mounting type
- M Size
- D CRI
- P Color temperature
- 8 Driver type
- 2 Power
- N Diffuser type
- 6
- S
- B Body color
- B




CONFIGURATE PRODUCT

BODY COLORS

- CRI: 8 80 CRI, 9 90 CRI
- COLOR TEMPERATURE: 2 2700 K, 3 3000 K, 4 4000 K, 1 RGBW, 5 Tunable White
- DRIVER TYPE: N ON-OFF, D DALI, P Push DIM, B Bluetooth
- POWER: 6 15 [W/m], 2 23 [W/m], 3 30 [W/m]
- DIFFUSER: M microprismatic, S standard (opal), L lenses

- Black
- Grey
- Anthracite
- White
- RAL
- Special Colors

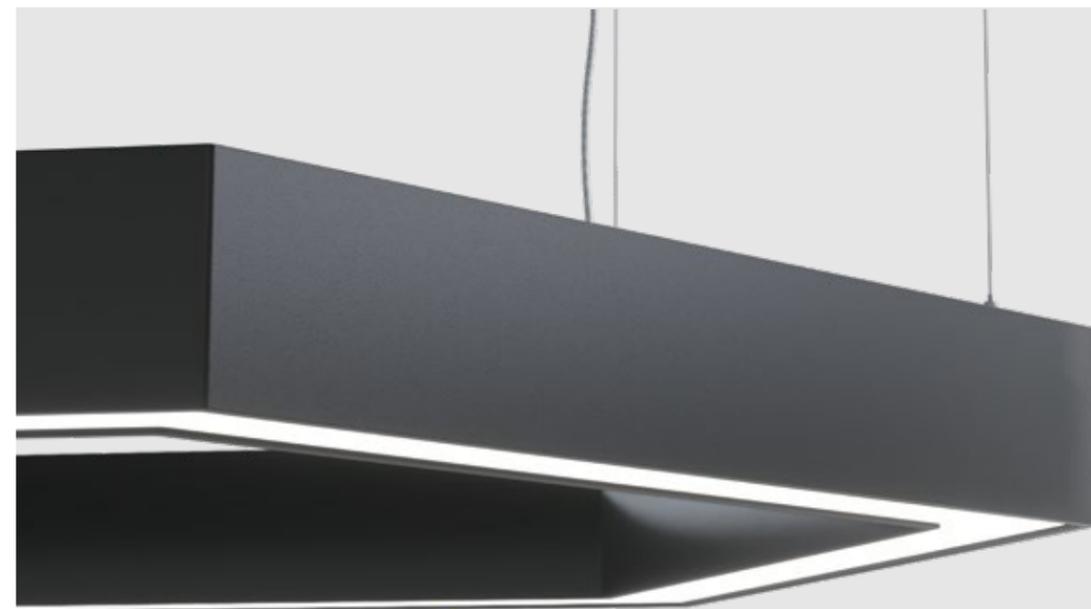



XENIA








XENIA

- Hexagonal LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

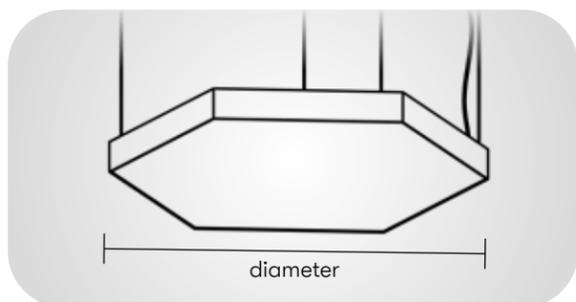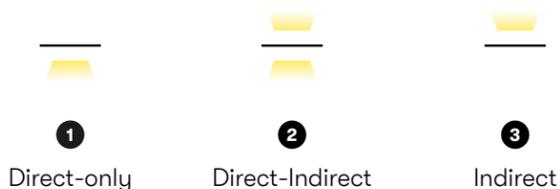


MOUNTING TYPES

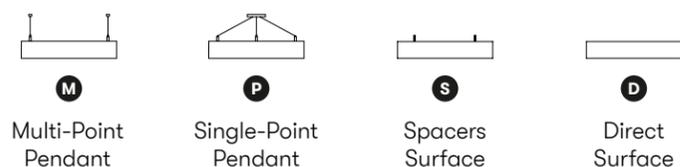

PROFILE SIZES

Direct/indirect options

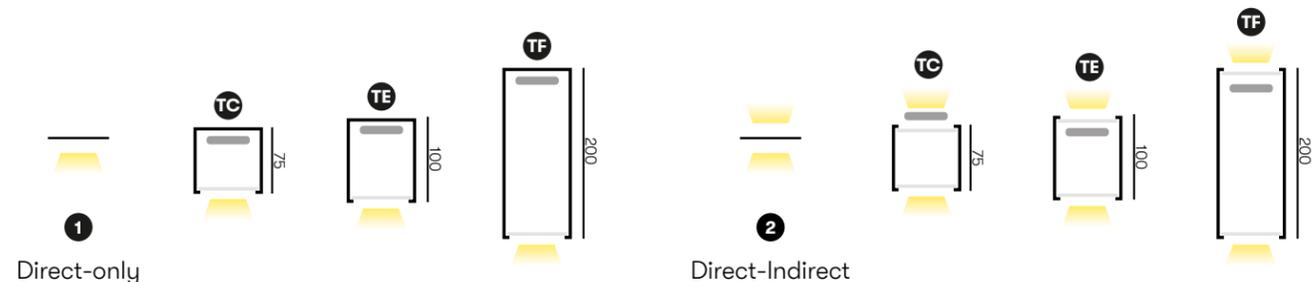

	Size	Power	Light Flux*
Direct-only	QA Ø800	75 W	7500 lm
	QC Ø1000	95 W	9500 lm
	QF Ø1200	110 W	11000 lm
Direct-Indirect	QA Ø800	113 W	7500 lm
	QC Ø1000	143 W	9500 lm
	QF Ø1200	165 W	11000 lm
Indirect	QA Ø800	75 W	7500 lm
	QC Ø1000	95 W	9500 lm
	QF Ø1200	110 W	11000 lm

* Calculated at 4000K color temperature

- X — Luminaire name
- E — Lighting type
- 1 — Profile size
- T — Mounting type
- F — Size
- M — CRI
- Q — Color temperature
- F — Driver type
- 8 — Power
- 2 — Diffuser type
- N —
- C —
- S —
- B — Body color



CONFIGURATE PRODUCT

BODY COLORS

- CRI
 - 8 80 CRI
 - 9 90 CRI
- COLOR TEMPERATURE
 - 2 2700 K
 - 3 3000 K
 - 4 4000 K
- DRIVER TYPE
 - 1 RGBW
 - 5 Tunable White
- DIFFUSER
 - M microprismatic
 - S standard (opal)
 - L lenses
- POWER
 - C Custom [W/m]
- DRIVER TYPE
 - N ON-OFF
 - D DALI
 - P Push DIM
 - B Bluetooth

- Black
- Grey
- Anthracite
- White
- RAL
- Special Colors







AMY

- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES

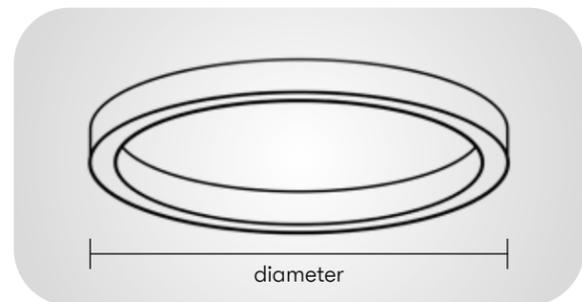

PROFILE SIZES


Direct/indirect options



internal driver



external driver

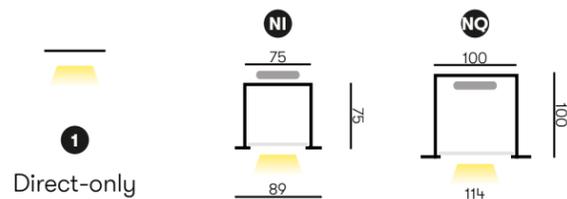


	Size	Power*	Light Flux**
DL	Ø620	45 W	5040 lm
DM	Ø750	54 W	6048 lm
QC	Ø1000	72 W	8064 lm
QF	Ø1200	87 W	9744 lm
QJ	Ø1500	108 W	12096 lm
QK	Ø1800	130 W	14560 lm
QL	Ø2000	145 W	16240 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	2 23 [W/m]	S standard (opal)
	4 4000 K	D DALI		L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

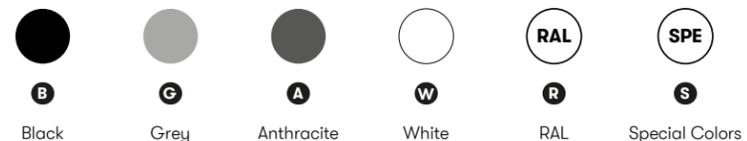

- A Luminaire name
- M Lighting type
- 1 Profile size
- R Mounting type
- Q L Size
- 8 CRI
- 2 Color temperature
- N Driver type
- 6 Power
- S Diffuser type
- B B Body color



CONFIGURATE PRODUCT







AUDREY

- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES



PROFILE SIZES


Direct/indirect options



internal driver



external driver

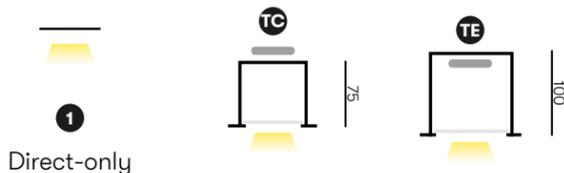


	Size	Power	Light Flux*
DD	Ø315	23 W	1900 lm
DG	Ø415	36 W	3300 lm
DK	Ø615	60 W	5500 lm
QB	Ø815	80 W	7500 lm
QD	Ø1015	100 W	9300 lm

** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White		S standard (opal)
	4 4000 K	D DALI		L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

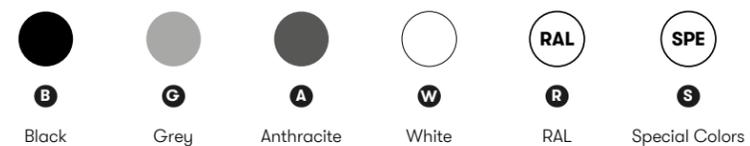


- A** Luminaire name
- M** Lighting type
- 1** Profile size
- C** Mounting type
- R** Size
- Q** CRI
- D** Color temperature
- 8** Driver type
- 2** Power
- N** Diffuser type
- C** Diffuser type
- S** Body color



CONFIGURATE PRODUCT




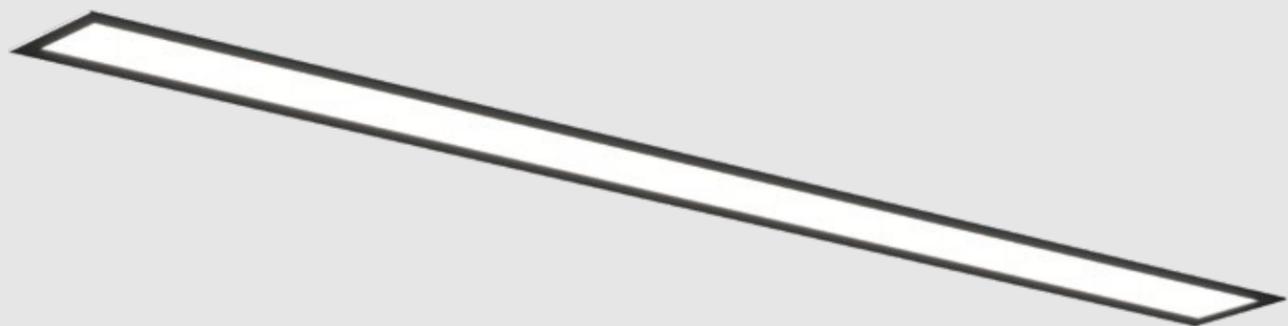

LIANNA

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES



PROFILE SIZES


Direct/indirect options



internal driver



external driver

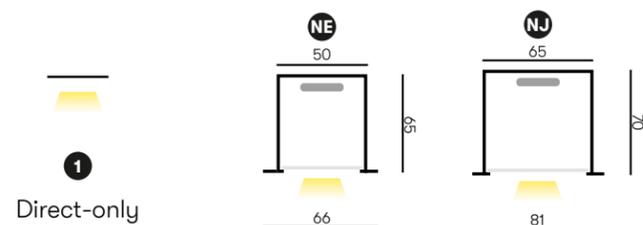


	Size	Power*	Light Flux**
LG	1140	26 W	2912 lm
LL	1420	33 W	3696 lm
LO	1980	46 W	5152 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	2 23 [W/m]	S standard (opal)
	4 4000 K	D DALI	3 30 [W/m]	L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

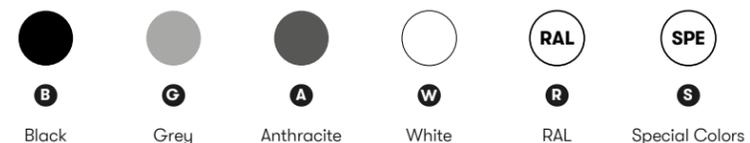


- L — Luminaire name
- A — Lighting type
- 1 — Profile size
- J — Mounting type
- R — Size
- L — CRI
- G — Color temperature
- 8 — Driver type
- 2 — Power
- N — Diffuser type
- S — Body color



CONFIGURATE PRODUCT




DARCY


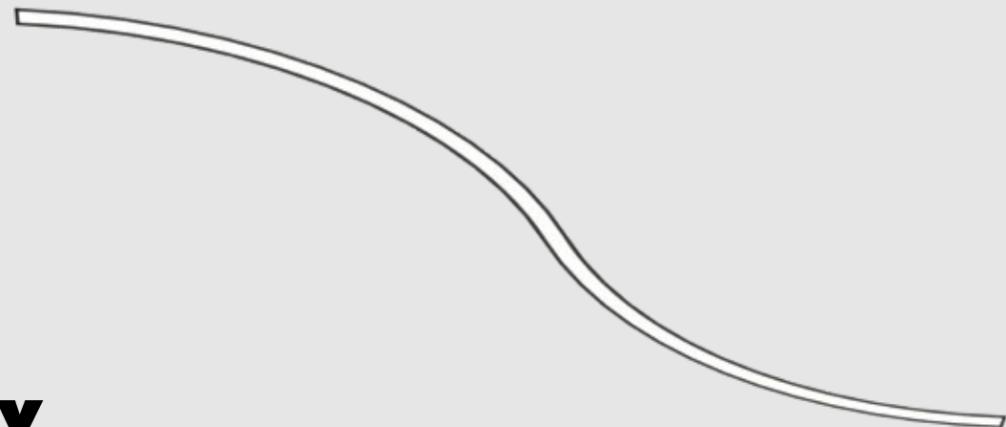


- Curved linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES

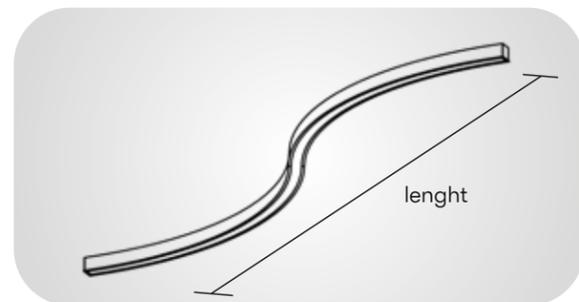

PROFILE SIZES



Direct/indirect options



internal driver



external driver




Size	Power*	Light Flux**
1000	23 W	2576 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	2 23 [W/m]	S standard (opal)
	4 4000 K	D DALI	3 30 [W/m]	L lenses
		P Push DIM		
		B Bluetooth		

BODY COLORS

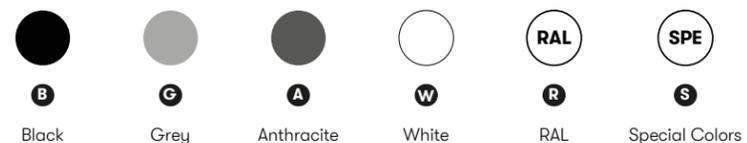

D Luminaire name
A Lighting type
1 Profile size
R Mounting type
L Size
8 CRI
2 Color temperature
N Driver type
2 Power
S Diffuser type
B Body color




CONFIGURATE PRODUCT





DOTLINE R

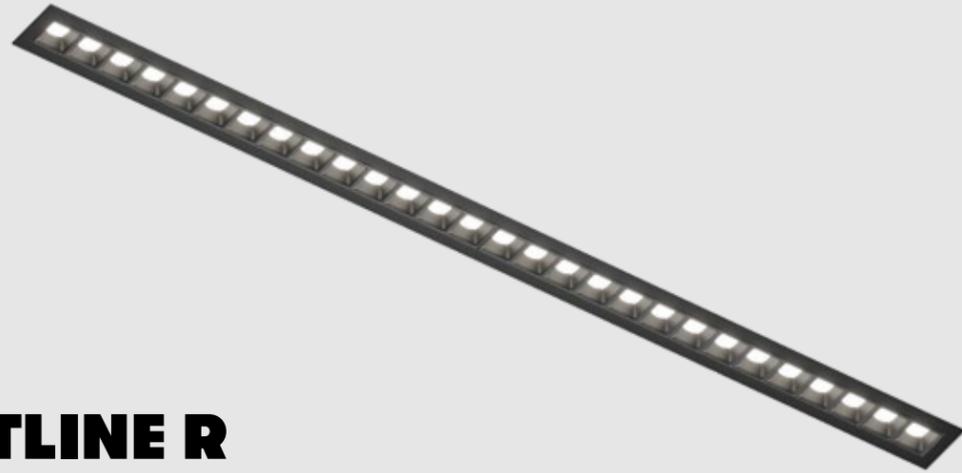

DOTLINE R

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES



MOUNTING TYPES



PROFILE SIZES

Direct/indirect options



internal driver



external driver




	Size	Power*	Light Flux**
LC	845	21 W	1869 lm
LF	1122	28 W	2492 lm
LK	1400	35 W	3115 lm
LM	1680	42 W	3738 lm

* Calculated with 23 W/m

** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White		S standard (opal)
	4 4000 K	N ON-OFF		L lenses
		D DALI		
		P Push DIM		
		B Bluetooth		

BODY COLORS

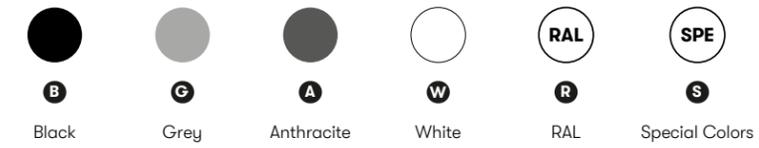


D R 1 A M R L C 8 2 N C S B B

- Luminaire name
- Lighting type
- Profile size
- Mounting type
- Size
- CRI
- Color temperature
- Driver type
- Power
- Diffuser type
- Body color



CONFIGURATE PRODUCT

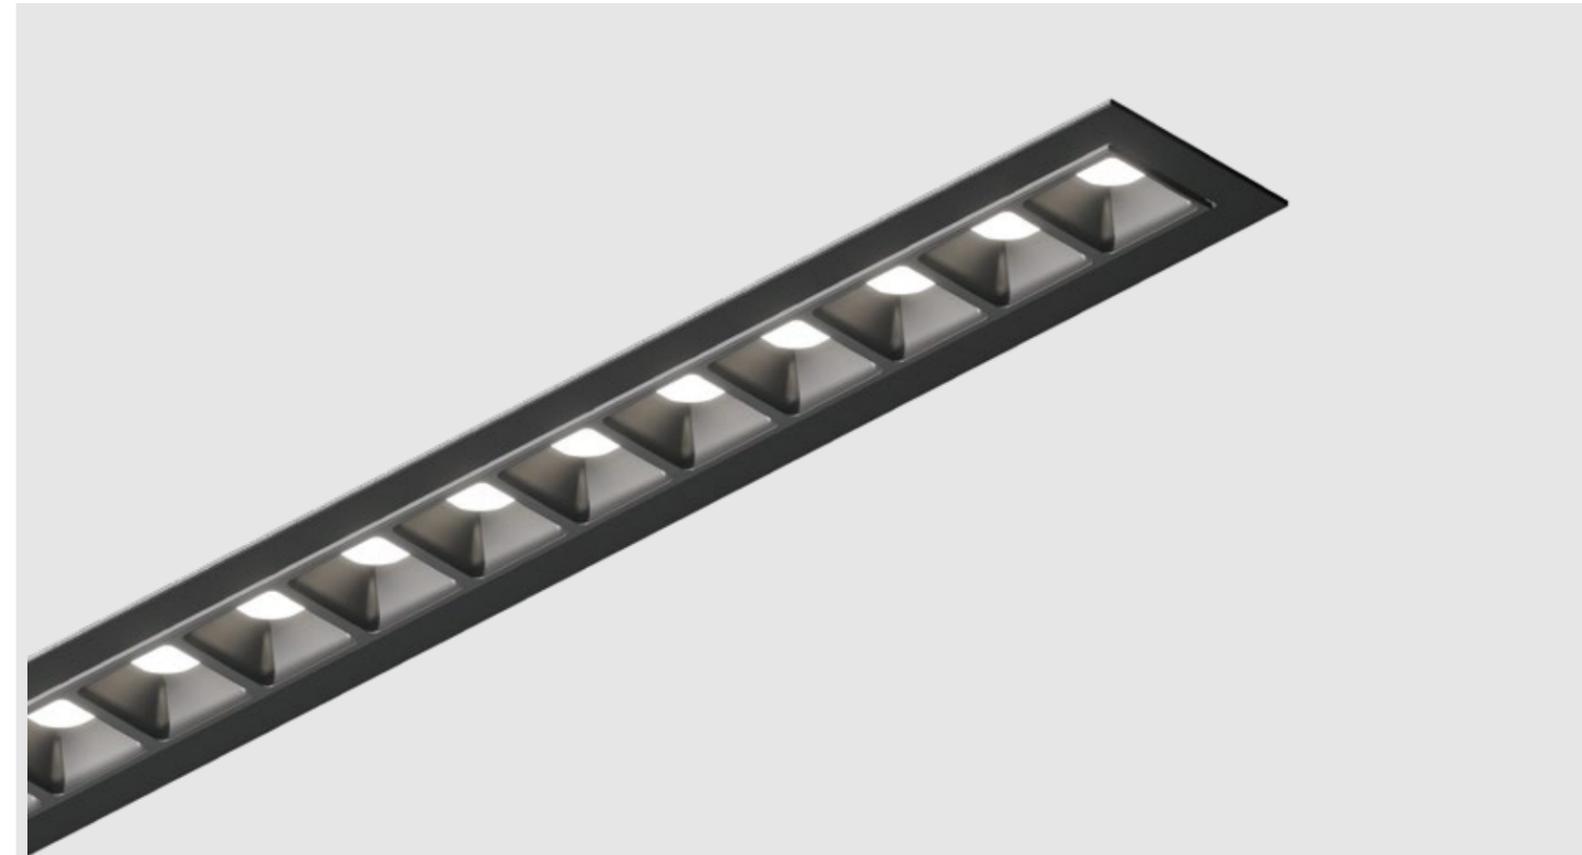

COLORS

AVAILABLE COLORS & CODES



B

Black



G

Grey



A

Anthracite



W

White



RAL

R

RAL



SPE

S


Special Colors

SPECIAL COLOR SELECTION



PSC01

Arctic Ice



PSC02

Fox Silver



PSC03

Volcanic Ash




PSC04

Brown



PSC05

Medium Bronze



PSC06

Dark Bronze



PSC07

Halo



PSC08

Timeless Gold



PSC09

Sunny Gold



PSC10

Gold



PSC11

Light Bronze



PSC12

Champagne



PSC13

Lotus



PSC014

Aubergine



PSC15

Cocoa Brown



PSC16

Amber Gold

PRODUCT ORDER CODE

- 1 - RGBW
- 2 - 2700 K
- 3 - 3000 K
- 4 - 4000 K
- 5 - Tuneable White

- M - Multi-point
- P - Single-Point
- T - Rod (Tube)
- S - Spacers
- D - Direct
- R - Recessed

- D - DALI
- N - Non-Dimmable
- P - Phase-Cut Dimmable
- B - Bluetooth

- M - Microprismatic
- S - Standard (Opal)

e.g.: OL - Olena

e.g.: DH - Ø450

Luminaire name

Lighting type

Profile size

Mounting type

Size

CRI

Color temperature

Driver type

Power

Diffuser type

Body color

OL1TI MDH 82N6S BB

- 1 - Direct
- 2 - Direct/Indirect
- 3 - Indirect

- 8 - 80 CRI
- 9 - 90 CRI

- B - Black
- W - White
- G - Grey
- A - Anthracite
- R - RAL Code
- S - Special Colors

- 0 - 15 W
- 1 - 18 W
- 2 - 23 W
- 3 - 30 W
- C - Custom

H-1036 Budapest
Nagyszombat utca 1.

pontlight.com

